


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

Barber County. Sec. 4 Twp. 31 Rge. (E) 15 (W)

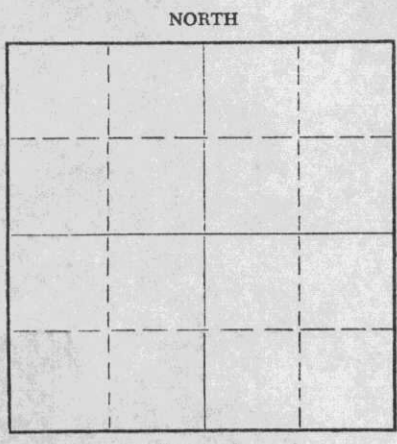

Location as "NE/CNW/SW" or footage from lines C NW SW  
Lease Owner Aylward Drilling Company  
Lease Name Lenkner Well No. 1  
Office Address 813 First National Bank Bldg. - Wichita 2, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) D & A  
Date well completed January 29 19 62  
Application for plugging filed January 28 19 62  
Application for plugging approved January 28 19 62  
Plugging commenced January 28 19 62  
Plugging completed January 29 19 62  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19 \_\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4826 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	795'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Mud to 300 feet  
Plug at 300 feet with 20 sacks cement through drill pipe  
Mud to 40 feet  
Plug at 40 feet with 10 sacks cement, dry.  
Bridged rathole and 2 sacks cement, dry.

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 27 1962  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Company tools  
Address \_\_\_\_\_

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Charles D. Williams (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles D. Williams  
813 1st Nat'l Bank Bldg. - Wichita 2, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 1st day of February, 19 62

My commission expires December 11, 1965  
Duane Jessup Notary Public.



COPY

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

Company- AYLWARD DRILLING & LEHEN DRILL., INC.  
Farm- Lenker No. 1

SEC: 4 T. 31 R. 15W  
C NW SW

Total Depth. 4851'  
Comm. 1-11-62 Comp. 1-29-62  
Shot or Treated.  
Contractor. Aylward Drilg.  
Issued. 6-16-62

County Barber  
KANSAS



CASING:  
8 5/8" 795' cem w/705' sz.

Elevation. 1776' KB

Production. Dry

Figures Indicate Bottom of Formations.

red bed, gyp & shells	40
red rock	70
sand	85
red rock	170
shells	197
red rock & gyp	380
red bed	795
red bed, shale & shells	1115
shale & shells	1310
shale - lime streaks	1500
shale & shells	1700
lime & shale streaks	1890
lime & shale	2050
lime	2675
broken lime & shale	2795
lime	2940
broken lime & shale	3135
lime & shale	3394
lime	3900
lime & shale	3980
lime	4174
lime & shale	4215
lime	4420
sand & lime	4480
lime	4568
lime & chert	4610
chert	4678
lime & chert	4701
chert & shale	4725
sandy shale	4780
shale	4820
lime	4851

Total Depth

TOPS: (LOG)

Heebner	3755
Douglas	3798
Brown Limestone	3906
Lansing-Kansas City	3936
Massy Zone	4372
Viola	4530
Simpson	4704
Simpson Sand	4742
Arbuckle	4794

DST 4345-85', op 40 min., Rec. 50' mud.  
IBHP 162#/30 min, FBHP 92.8#/50 min,  
FP 31#-42#.

Tops and drill stem test are taken from  
Schlumberger measurements, which are 25'  
higher than drillers measurements.

**RECEIVED**  
STATE CORPORATION COMMISSION

JUN 28 1962

CONSERVATION DIVISION  
Wichita, Kansas