


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Barber County, Sec. 9 Twp. 30 Rge. 13 E/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines
C of NE NW

Lease Owner National Oil Co.
Lease Name Lemon #1 Well No. _____
Office Address Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole) _____

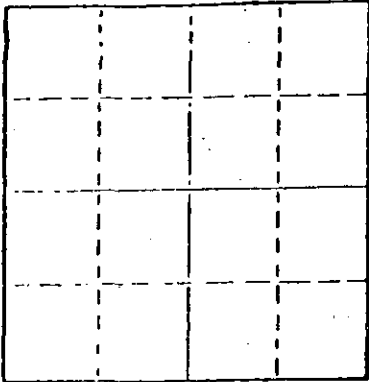

Locate well correctly on above
Section Plot

Date Well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 2/5/80 _____ 19____
Plugging completed 2/13/80 _____ 19____
Reason for abandonment of well or producing formation
depleted _____

If a producing well is abandoned, date of last production
_____ 19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Owen
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4700
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10-3/4"	280	none
				5 1/2"	4695	3435'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Sanded to 4500' and ran 5 sacks cement. Shot pipe at 3595', 3400', pulled 109 joints.
Squeezed hole with 4 sacks hulls, 0 sacks gel, 4 sacks hulls. Released plug and
displaced with 150 sacks 50-50 pozmix, 4% gel and 3% cc.

PLUGGING COMPLETE.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
R. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) _____

CHASE, KANSAS

RECEIVED
FEB 15 1980
STATE CORPORATION COMMISSION
WICHITA, KANSAS
2-21-80

SUBSCRIBED AND SWORN TO before me this 19th day of _____, 19 80

Margaret Melcher
Notary Public.

My commission expires _____



API #

WELL LOG

WF

15-007-20,807

Company

SEC. 9 T. 30S R. 13W

NO. 1

LOC. C NE NW


TOTAL DEPTH 4700'

COUNTY Barber

COMM. 10-22-79

COMP. 11-2-79

CONTRACTOR DaMac Drilling Inc.



CASING 8 5/8 set @ 280'

ELEVATION

PRODUCTION 5 1/2 set @ 4695'

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand, RedBed	0	280
Shale, RedBed	280	1400
Lime, Shale	1400	4405
Lime	4405	4700 RTD

RECEIVED
STATE CORPORATION COMMISSION
JAN 25 1980
CONSERVATION DIVISION
Wichita, Kansas

State of Kansas }
County of Barton } ss

I, Martha J. McKown of DaMac Drilling Inc.

upon oath state the above and foregoing is a true and correct copy of the log of the Lemon No. 1 well.

Martha J. McKown

Subscribed and sworn to before me this 6th day of November 1979

My Commission Expires: 4-28-81

LANA L. REMMERT
Barton County, Kansas
My Appl. Exp. 4-28-81

Lana L. Remmert
NOTARY PUBLIC