

15-007-00356-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

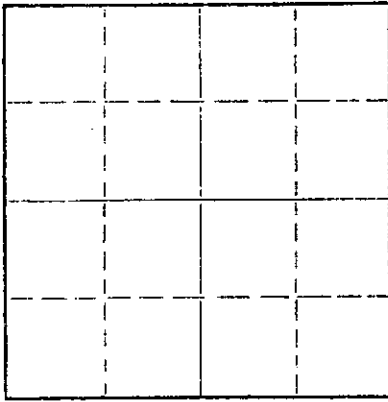

Locate well correctly on above
Section Plat

Barber County, Sec. 13 Twp. 32 Rge. (E) 11 (W)
Location as "NE/CNW/SW" or footage from lines C E/2
Lease Owner Santa-Fe Pipe & Supply, Inc.,
Lease Name Minnie McGuire Well No. 1
Office Address Box 562, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) gas
Date well completed _____ 19____
Application for plugging filed April 12 19 69
Application for plugging approved April 15 19 69
Plugging commenced April 23 19 69
Plugging completed April 28 19 69
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	200'	none
				5-1/2"	4499'	3461.59'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

4500' - 4485' - plug
4485' - 4400' - sand
4400' - 4360' - 5 sacks cement
4360' - 200' - mud
200' - 190' - rock bridge
190' - 115' - 25 sacks cement
115' - 40' - mud
40' - 30' - rock bridge
30' - base 10 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
MAY 19 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Santa-Fe Pipe & Supply, Inc.,
Address Box 562, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
T. L. Nutt

(Employer or owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *T. L. Nutt*
Box 562, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 17th day of May, 19 69

My commission expires July 31, 1970
Mary M. Guesnier
Notary Public.

15-087-00356-0000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPY

MUSGROVE PETROLEUM CORPORATION &
Company- GULF OIL CORPORATION
Farm- Minnie McGuire No. 1

SEC. 13 T. 32 R. 11W
C E/2 SE

Total Depth. 4500 PBD 4485
Comm. 12-11-56 Comp. 2-8-57
Shot or Treated.
Contractor. Lewis Drilling Co.
Issued. 7-13-57

County Barber
KANSAS



CASING:
8 5/8 @ 200' w/ 200 sx cmt.
5 1/2 @ 4499' w/ 150 sx cmt.

Elevation. 1502 DF

Production. 2,010,000 CFGPD

Figures indicate Bottom of Formations.

red bed & shale	1580
lime & shale	3590
lime	4245
lime & shale	4380
lime & chert	4448
lime	4500
Total Depth	

Plugged back to 4485

TOPS:	
Heebner	3545
Douglas shale	3613
Douglas sand	3664
Lansing	3727
Penn. sand (scout)	4385
Basal Conglomerate	4400
Reworked Mississippi	4414
Mississippi chert	4423
Mississippi lime	4427

Perf. 24/4412-20, Perf/ 6/4420-22
500 gal acid, failed, Perf. 6/4422-24
would not take acid, Reperf 24/4412-24

State Land Comm
500 Insurance
Per
Wichita
From Santa Fe
Peje. Saffel

RECEIVED
STATE CORPORATION COMMISSION
APR 8 1969
4-8-69
CONSERVATION DIVISION
Wichita, Kansas