


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Barber County. Sec. 9 Twp. 32S Rge. 11W E/W  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines  
660' ESL & 1980' FEL  
Lease Owner Texas Oil & Gas Corporation  
Lease Name Rändels Well No. 1  
Office Address 200 W. Douglas-Suite 300, Wichita, KS  
Character of Well (Completed as Oil, Gas or Dry Hole) 67202  
Dry Hole

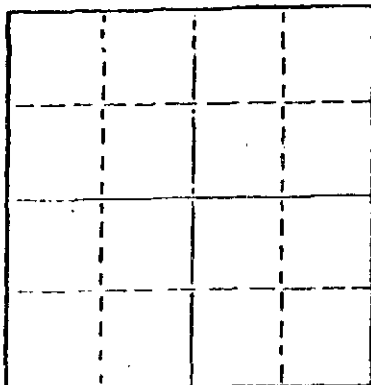

Locate well correctly on above  
Section Plot

Date Well completed November 14, 1980  
Application for plugging filed Verbal Application 19  
Application for plugging approved Verbal Approval 19  
Plugging commenced November 14, 1980  
Plugging completed November 14, 1980  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William T. Owen  
Producing formation Depth to top Bottom Total Depth of Well 4,427  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	266'	None


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud from 4,427 ft. (rotary total depth) to 270 ft. Set plug at 270 ft. and cemented with 40 sacks cement. Filled hole with heavy rotary mud from 270 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 10 sacks cement in rat hole and 5 sacks cement in mouse hole.

Plugging operations accomplished utilizing Dowell Oil Well cementing pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Dowell Div., Dow Chemical Co.  
Hwy. 281 & Santa Fe, Pratt, Kansas



STATE OF Kansas COUNTY OF Sedgwick  
Dean Britting, Agent (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) Dean Britting  
251 N. Water-Suite 10, Wichita, KS 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of November, 1980

Elsie Willison  
Elsie Willison - Notary Public.

My commission expires July 25, 1982

KANSAS DRILLERS LOG

COMPANY Texas Oil & Gas Corporation

SEC. 9 T. 32S R. 11W

FARM Randels NO. 1

LOC. 660' FSL & 1980' FEL

COUNTY Barber

ROTARY TOTAL DEPTH 4,427'

COMM. November 6, 1980 COMP. November 14, 1980

CONTRACTOR H-30, INC. (Rig #5)

ISSUED November 21, 1980

CASING

10 3/4"

8 5/8" Set at 266' cemented w/275 sxs cement

5 1/2"

4 1/2"

ELEVATION 1,509' K.B.

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand, Shale and Red Bed	286'
Shale and Red Bed	1,795'
Shale and Lime	4,382'
Lime and Shale	4,397'
Shale and Lime	4,427'
Rotary Total Depth	4,427'

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

*Dean Britting*  
Dean Britting

State of Kansas )  
                          ) ss:  
County of Sedgwick )

Subscribed and Sworn to before me a Notary Public in and for said county and state this 21st day of November, 1980.

*Elsie Willison*  
Elsie Willison - Notary Public

My Commission Expires:  
July 25, 1982

RECEIVED  
OIL & GAS CORPORATION COMMISSION  
JAN 6 1981  
1-6-81  
CONSERVATION DIVISION  
Wichita, Kansas