

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Building  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

API NUMBER 15-007-22,273-60-06

LEASE NAME Falen "A"

WELL NUMBER 2

3960 Ft. from S Section Line

1980 Ft. from E Section Line

SEC. 4 TWP. 34S RGE. 13(X) or (W)

COUNTY Barber

Date Well Completed 11/19/89

Plugging Commenced 11/19/89

Plugging Completed 11/19/89

TYPE OR PRINT  
NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

LEASE OPERATOR TXO PRODUCTION CORPORATION

ADDRESS 1660 Lincoln St. - Suite 1800, Denver, Colo. 80246

PHONE# (303) 861-4246 OPERATORS LICENSE NO. 5171

Character of Well D & A

(Oil, Gas, D&A, SMD, Input, Water Supply Well)

The plugging proposal was approved on November 19, 1989 (date)

by Duane Rankin (KCC District Agent's Name).

Is ACO-1 filed? Operator to be filed by Operator if not, is well log attached? Yes

Producing Formation \_\_\_\_\_ Depth to Top \_\_\_\_\_ Bottom \_\_\_\_\_ T.D. 5100'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
		0	391'	8-5/8"	384'	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet each set.  
50 sx at 600', 50 sx at 430', 10 sx 40' to surface, 15 sx in rathole, 10 sx in mousehole

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor DUKE DRILLING CO., INC. License No. 5929

Address 310 West Central - Suite 117, Wichita, Kansas 67202 11-29-89

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: TXO PRODUCTION CORPORATION

STATE OF KANSAS COUNTY OF SEDGWICK 11-29-89 NOV 29 1989

Ralph R. Hamilton (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filled that the same are true and correct, so help me God.

(Signature) [Signature]

(Address) 310 West Central - Suite 117  
Wichita, Kansas 67202



SUBSCRIBED AND SWORN TO before me this 27th day of November, 19 89

[Signature]  
Notary Public

My Commission Expires: December 6, 1992

DRILLER'S WELL LOG

TXO PRODUCTION CORPORATION  
FALEN "A" #2  
Barber County, Kansas

COMMENCED: November 9, 1989  
COMPLETED: November 19, 1989

0' - 1090' Surface  
1090' - 1310' Red Beds  
1310' - 2145' Shale & Shells  
2145' - 2600' Shale  
2600' - 3105' Shale & Lime  
3105' - 3695' Lime & Shale  
3695' - 4065' Shale & Lime  
4065' - 4740' Lime & Shale  
4740' - 5100' Shale & Lime  
5100' RTD

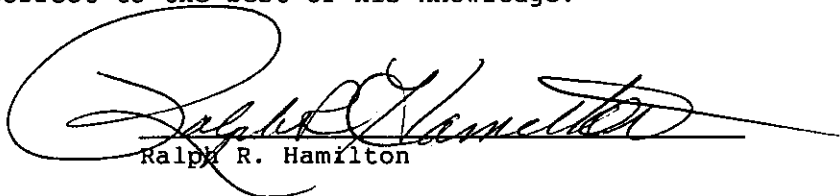
Surface Casing: Set 9 jts. New 8-5/8"  
24# @ 391' w/200 sacks Lite and 75 sacks  
Class "A" 2% gel, 3% cc.

Plugging: Bottom plug 50 sacks at 600',  
2nd Plug 50 sacks at 430', Top Plug 10  
sacks 40' to surface, 15 sacks in Rathole,  
10 sacks in Mousehole, 60/40 Pozmix, 6%  
gel.

AFFIDAVIT


STATE OF KANSAS )  
 ) ss:  
COUNTY OF SEDGWICK )

Ralph R. Hamilton, of lawful age, does swear and state that the facts  
and statements herein are true and correct to the best of his knowledge.

  
Ralph R. Hamilton

Subscribed and sworn to me this 27th day of November, 1989.



  
Sally R. Byers NOTARY PUBLIC

My Commission Expires: December 6, 1992.

RECEIVED  
STATE COMMISSION  
NOV 29 1989  
CONSERVATION DIVISION  
Wichita, Kansas