

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 4 Twp. 30S Rge. 15W (E) (W)

Location as "NE/CNW%SW%" or footage from lines C NW SW

Lease Owner Ferguson Oil Company & Walters Drilling Co.

Lease Name Lee 'A' Well No. 1

Office Address 1505 Wichita Plaza Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 10-29-65 19

Application for plugging filed 10-29-65 19

Application for plugging approved 10-29-65 19


Plugging commenced 10-29-65 19

Plugging completed 10-29-65 19

Reason for abandonment of well or producing formation commercial quantities of oil not found

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

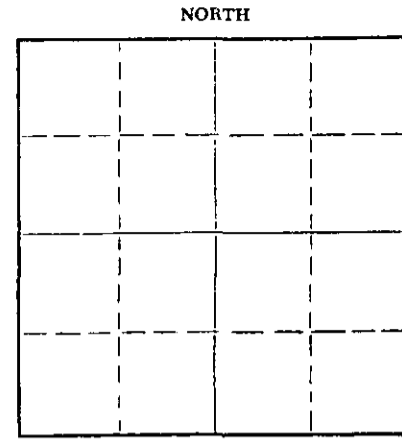

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4915 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	247'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plug @ 240' w/ 25 sx. cement.
" " 40' w/ 10 sx. cement.
2 sx. for rathole

RECEIVED
STATE CORPORATION COMMISSION

NOV 12 1965

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Walters Drilling Co.
Address 510 Orpheum Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Robert F. Walters

(Employer or Operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert Walters
510 Orpheum Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of November, 19 65

My commission expires October 4, 1967
Juanita M. Green Notary Public



DRILLER'S LOG

COMPANY: FERGUSON OIL COMPANY & WALTERS DRILLING CO.
 1505 WICHITA PLAZA BUILDING
 WICHITA, KANSAS

WELL NAME: LEE 'A' #1
 C NW SW SEC. 4-30S-15W
 BARBER COUNTY, KANSAS

CONTRACTOR: WALTERS DRILLING CO.
 510 ORPHEUM BUILDING
 WICHITA, KANSAS

ROTARY DRILLING COMMENCED: OCTOBER 15, 1965
 ROTARY DRILLING COMPLETED: OCTOBER 29, 1965

ELEVATION: 2011 KB

CASING RECORD: 8 5/8" set @ 247' w/ 175 sks

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 12 1965
 CONSERVATION DIVISION
 Wichita, Kansas


LOG

0 - 40	Sand
40 - 165	Sand and Shale
165 - 250	Red Bed
250 - 730	Red Bed and Shale
730 - 1084	Shale and Shells
1084 - 1435	Shale and Gyp
1435 - 1860	Shale and Shells
1860 - 2185	Shale and Lime Streaks
2185 - 2335	Lime
2335 - 2463	Lime and Shale
2463 - 2581	Lime
2581 - 2839	Lime and Shale
2839 - 3365	Shale and Lime
3365 - 3505	Shale and Lime Streaks
3505 - 3635	Lime and Shale
3635 - 3745	Shale and Lime
3745 - 3945	Lime and Shale
3945 - 4115	Shale and Lime and Sand
4115 - 4188	Lime and Shale
4188 - 4420	Lime
4420 - 4550	Lime and Shale
4550 - 4630	Lime
4630 - 4645	Lime and Shale
4645 - 4683	Lime and Chert
4683 - 4787	Lime and Chert
4787 - 4900	Lime and Shale
4900 - 4915	Lime
<u>4915</u>	<u>Rotary Total Depth - D & A</u>

The undersigned, Robert F. Walters, hereby certifies, in behalf of said company that the above log is a true and correct log of the formations encountered in drilling the above well as reflected by the Daily Drilling Reports.

WALTERS DRILLING CO.

Subscribed and sworn to before me
this 5th day of November, 1965.


Juanita M. Green, Notary Public

BY 
ROBERT F. WALTERS, Partner

My Commission Expires: October 4, 1967