


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Barber County. Sec. 19 Twp. 30S Rge. 15W (X) W (W)
Location as "NE/CNW/SW" or footage from lines C-NE-NE
Lease Owner Magic Circle Oil
Lease Name National Gypsum Well No. 1
Office Address P.O. Box 16557, Okla. City, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 1967
Application for plugging filed March 24, 1967
Application for plugging approved March 27 1967
Plugging commenced March 28 1967
Plugging completed April 1 - 10:30 1967
Reason for abandonment of well or producing formation Dry

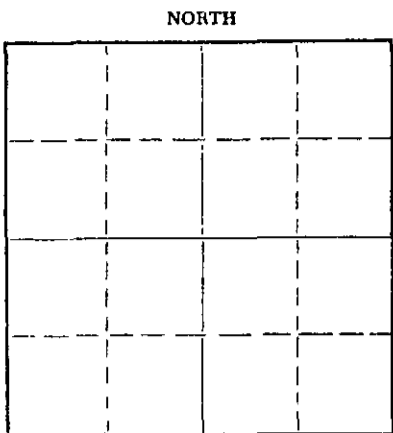

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well A. Elving
Producing formation Viola, Mississippi, Massey Depth to top 4350 Bottom 4630 Total Depth of Well 4685 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Massey	Dry	4365	4397	8 5/8	249	None
Mississippi	Dry	4485	4504	4 1/2	4640	3855
Viola	Dry	4521	4630			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged well Sand from 4610 - To 4475
Three (3) sacks Cement from 4475 - To 4454

Ripped pipe off at 4100 ft. and 3855 pulled 3855 - 4 1/2"

Plugged - Built wood bridge on top of fluid at 250.

Rock From 240 - To 230
25 Sacks of cement From 230 - To 155
Mud From 155 - To 40
Rock From 40 - To 30
10 Sacks of Cement From 30 - To Top

RECEIVED
STATE CORPORATION COMMISSION
APR 10 1967
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Clarke Corp. #853
Address Box 184, Medicine Lodge, Kansas

STATE OF OKLAHOMA, COUNTY OF OKLAHOMA
WM. J. O'CONNOR and ss. (employee of owner) and operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Wm J O'Connor
P.O. Box 16557, Okla. City, Okla.
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of April, 1967
Shirley Ann Leuten Notary Public.

My commission expires July 8, 1970