

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-063-22160-00-00
Spot: SESWNENW Sec/Twnshp/Rge: 27-12S-30W
1143 feet from N Section Line, 1968 feet from W Section Line
Lease Name: LUBBERS Well #: 2-27
County: GOVE Total Vertical Depth: 4432 feet

Operator License No.: 6039
Op Name: L. D. DRILLING, INC.
Address: 7 SW 26TH AVE
GREAT BEND, KS 67530

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	347		300 sx

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 12/06/2013 12:00 AM
Plug Co. License No.: 6039 Plug Co. Name: L. D. DRILLING, INC.
Proposal Rcvd. from: RICK Company: L. D. DRILLING, INC. Phone: (620) 617-6794

Proposed Plugging Method: Ordered 205 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN WitnessType: NONE
Date/Time Plugging Completed: 12/06/2013 10:45 AM KCC Agent: DAVID WANN

Actual Plugging Report:

Perfs:

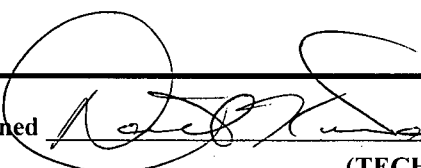
1st plug @2220 w/25 sx
2nd plug @1350 w/100 sx
3rd plug @397 w/40 sx
4th plug @40 w/10 sx

Rathole 30 sx

Remarks: BASIC

Plugged through: DP

District: 04

Signed 
(TECHNICIAN) CM

12/20/2013

KCC WICHITA

DEC 12 2013

RECEIVED

DEC 09 2013