

STATE CORPORATION COMMISSION OF KANSAS  
OIL & GAS CONSERVATION DIVISION

WELL COMPLETION OR RECOMPLETION FORM  
ACO-1 WELL HISTORY

DESCRIPTION OF WELL AND LEASE

Operator: License # 5050  
Name Hummon Corporation  
Address 400 One Main Place  
City/State/Zip Wichita, KS 67202

Operator Contact Person Wilber D. Berg  
Phone (316) 263-8521

Contractor: License # 5148  
Name Big-H Drilling, Inc.

Wellsite Geologist Dave Goldak  
Phone (316) 263-8521

PURCHASER NONE

Designate Type of Completion  
 New Well  Re-Entry  Workover

Oil  SWD  Temp Abd  
 Gas  Inj  Delayed Comp  
 Dry  Other (Core, Water Supply etc.)

If OWWO: old well info as follows:  
Operator  
Well Name  
Comp. Date Old Total Depth

WELL HISTORY

Drilling Method:  
 Mud Rotary  Air Rotary  Cable

1/5/85 1/11/85 1/12/85  
Spud Date Date Reached TD Completion Date  
3850'  
Total Depth PBTD

Amount of Surface Pipe Set and Cemented at 213 feet

Multiple Stage Cementing Collar Used?  Yes  No  
If yes, show depth set feet

If alternate 2 completion, cement circulated  
from feet depth to w/ SX cmt

API NO. 15-007-21-983-0000

County Barber

NE SW SE Sec. 21 Twp. 32S Rge. 11  
 East  West

990 Ft North from Southeast Corner of Section  
1650 Ft West from Southeast Corner of Section

(Note: Locate well in section plat below)


Lease Name Lukens Trust Well # 1

Field Name Wildcat

Producing Formation None

Elevation: Ground 5126 KB 5139

Section Plat

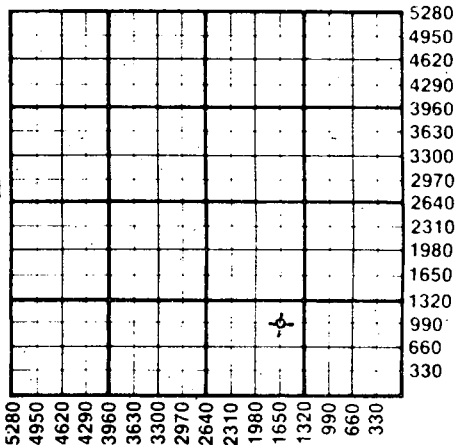

WATER SUPPLY INFORMATION

Source of Water:  
Division of Water Resources Permit #

Groundwater Ft North from Southeast Corner  
(Well) Ft West from Southeast Corner of  
Sec Twp Rge  East  West

Surface Water Ft North from Southeast Corner  
(Stream, pond etc) Ft West from Southeast Corner  
Sec Twp Rge  East  West

Other (explain) J & M Water Service  
(purchased from city, R.W.D.#)

Disposition of Produced Water:  Disposal  Repressuring

Docket #

RECEIVED  
STATE CORPORATION COMMISSION  
JAN 18 1985  
1-18-85  
OIL & GAS CONSERVATION DIVISION  
Wichita, Kansas

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rule 82-3-130 and 82-3-107 apply. Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months. One copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature Wilber D. Berg

Title Wilber D. Berg, Production Supt. Date 1/14/85

Subscribed and sworn to before me this 14th day of January 1985

Notary Public Sandra L. Mendoza  
Date Commission Expires 2/13/86

K.C.C. OFFICE USE ONLY  
F  Letter of Confidentiality Attached  
C  Wireline Log Received  
C  Drillers Timelog Received  
Distribution  
 KCC  SWD/Rep  NGPA  
 KGS  Plug  Other  
(Specify)

SANDRA L. MENDOZA  
STATE NOTARY PUBLIC  
SEDGWICK COUNTY, KANSAS  
MY APPT. EXP.

SIDE TWO

Operator Name Humon Corp. Lease Name Lukens Tr. Well # 1 SEC. 21 TWP. 32S RGE. 11  East  West

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken  Yes  No  
 Samples Sent to Geological Survey  Yes  No  
 Cores Taken  Yes  No

Formation Description  
 Log  Sample

DST #1: 2851 - 2868

30/60/45/90 SIP 1192/1192  
 Rec. 1200' GSW FP 70/398 418/646  
 CHL 92,000 PPM HP 1350/1310  
 BHT 96°

DST #2: 3655 - 3690

45/90/45/90 SIP 199/159  
 Rec. 30' mud FP 40/40 60/60  
 60' VSOCM HP 1843/1824  
 Show of free oil in tool BHT 106°

Name	Top	Bottom
Onaga SH	2626	(-1087)
Wabaunsee	2690	(-1151)
Tarkio LS	2847	(-1308)
Elgin SH	3432	(-1893)
Heebner	3618	(-2079)
Douglas LS	3680	(-2141)
Douglas SH	3704	(-2165)
Lansing	3798	(-2259)
LTD	3848	(-2309)

CASING RECORD <input type="checkbox"/> New <input type="checkbox"/> Used							
Report all strings set-conductor, surface, intermediate, production, etc.							
Purpose of String	Size Hole Drilled	Size Casing Set (in O.D.)	Weight Lbs/Ft.	Setting Depth	Type of Cement	#Sacks Used	Type and Percent Additives
Surface	12 1/2"	8-5/8"	23 1/2	213'	Common	200	2% Gel 3% CC
PERFORATION RECORD				Acid, Fracture, Shot, Cement Squeeze Record			
Shots Per Foot	Specify Footage of Each Interval Perforated			(Amount and Kind of Material Used)			Depth
TUBING RECORD				Liner Run <input type="checkbox"/> Yes <input type="checkbox"/> No			
Size	Set At	Packer at					
Date of First Production		Producing Method					
		<input type="checkbox"/> Flowing <input type="checkbox"/> Pumping <input type="checkbox"/> Gas Lift <input type="checkbox"/> Other (explain).....					
Estimated Production Per 24 Hours		Oil	Gas	Water	Gas-Oil Ratio	Gravity	
		Bbls	MCF	Bbls	CFPB		

METHOD OF COMPLETION Production Interval

Disposition of gas:  Vented  Open Hole  Perforation  
 Sold  Other (Specify) .....  
 Used on Lease  Dually Completed .....  
 Commingled .....

DRILLERS LOG

Lukens Trust #1

CASING RECORD:	COMPANY: Hummon Corporation	DESCRIPTION:
8-5/8" @ 213' w/200 sx. cement	CONTRACTOR: Big - H Drilling	NE SW SE 21-32S-11W Barber Co., KS
D & A	COMMENCED: January 5, 1985	ELEVATION: 1539 KB
	COMPLETED: January 12, 1985	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Red Beds	0	290	
Red Beds & Shale	290	888	
Shale & Lime	888	1763	
Lime & Shale	1763	2010	
Shale & Lime	2010	2868	
Lime & Shale	2868	3121	
Shale & Lime	3121	3267	
Lime & Shale	3267	3639	
Shale & Lime	3639	3690	
Lime & Shale	3690	3764	
Shale & Lime	3764	3850	
RTD		3850	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

BIG-H DRILLING, INC.

*Lisa J. Duffield*  
 Lisa J. Duffield

Subscribed and sworn to before this 16th day of January, 1985.

**SANDRA L. MENDOZA**  
 STATE NOTARY PUBLIC  
 SEDGWICK COUNTY, KANSAS  
 MY APPT. EXP. 2/19/86

*Sandra L. Mendoza*  
 Notary Public

**RECEIVED**  
 STATE CORPORATION COMMISSION

JAN 18 1985  
 1-18-85  
 CONSERVATION DIVISION  
 Wichita, Kansas