


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

BARBER County, Sec. 6 Twp. 3/8 Rge. 12 E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
1230 ESL 560 FWL
Lease Owner TEXAS OIL AND GAS
Lease Name MADDIX "A" Well No. 1
Office Address 200 W Douglas, Suite 300, Wichita, Ks.
Character of Well (Completed as Oil, Gas or Dry Hole) GAS

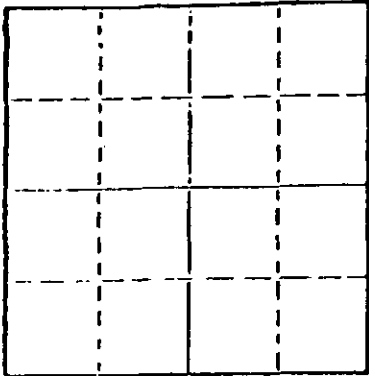

Locate well correctly on above
Section Plot

Date Well completed 1-20 1978
Application for plugging filed 7-26 1978
Application for plugging approved 7-29 1978
Plugging commenced 8-15 1978
Plugging completed 8-21 1978
Reason for abandonment of well or producing formation NOT PRODUCTIVE
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well BILL OWENS
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4302
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	331	None
				4 1/2"	4301	2040

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

BRIDGE PLUG SET AT 2830. Dumped sand from 2830 to 2630. 4 sacks cement from 2630 to 2600. Ripped at 2150 and 2040. Built wooden bridge at 340. Rock to 330. 5 1/2 yards ready mix.

STATE CORPORATION COMMISSION

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor CLARKE CORPORATION

STATE OF Kansas COUNTY OF Barber, ss.
Elmo R. Margueter (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Elmo R. Margueter
Medicine Lodge, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 24th day of August, 1978.

My commission expires April 4, 1982.
Jessie Hamilton Notary Public.

WF

DRILLERS' LOG

TEXAS OIL & GAS CORP.
Maddix 'A' No. 1
C NW SW, Sec. 6-31S-12W
Barber County, Kansas

Commenced: 1-17-75
Completed: 1-29-75

Elevation: 1703 K.B.

Surface: 323' of 8-5/8"
surface casing, cemented
w/275 sx common cement,
3% cc. 1-18-75.

FORMATION

DEPTH

Surface Hole	0 - 331
Red Bed & Shale	331 - 1070
Shale	1070 - 1395
Red Bend, Shale & Lime	1395 - 1830
Lime & Shale	1830 - 1888
Shale & Lime	1888 - 2100
Lime & Shale	2100 - 3115
Lime	3115 - 3646
Lime & Sand	3646 - 3653
Lime & Shale	3653 - 3836
Lime	3836 - 4282 RTD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me, the undersigned, a Notary Public in and for said state, this 13th day of February 1975.

My Commission Expires:
August 25, 1976

Ella Priess

Ella Priess, Notary Public

RECEIVED
STATE CORPORATION COMMISSION
JUL 27 1978
CONSERVATION DIVISION
Wichita, Kansas

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976

MADDAX 'A' #1

