


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD



Locate well correctly on above
Section Plat

Barber County, Sec. 30 Twp. 31S Rge. 10W (E) (W)
Location as "NE/CNWxSWx" or footage from lines. C-NW NW
Lease Owner Sicax Petroleum
Lease Name Mc Reynolds Well No. 1
Office Address 104 East Kansas Medicine Lodge Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed 8-18-66 1966
Application for plugging approved _____ 19____
Plugging commenced _____ 19____
Plugging completed 11:00 AM 8-29 1966
Reason for abandonment of well or producing formation Dry
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation Mississippi Depth to top 4525 Bottom 4525 Total Depth of Well 4525 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	250	NONE
				4 1/2	4525	3680

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dump sand From 4525 To 4500
Cement 3 Sacks From 4500 To 4470

Ripped pipe 27 4000
3940
3900
3850

Ripped pipe 27 3680 and recovered.

Build wood bridge 27 240
Then 10 feet of Rock From 240 To 230
Cement 25 Sacks From 230 To 155
Mud From 155 To 40
Rock 10 Sacks From 40 To 30
Cement 10 Sacks From 30 To Top

Well Plugged.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Clark Corp
Address Box 197 - Medicine Lodge Kansas


STATE OF KANSAS COUNTY OF Barber ss.
W. F. Roland (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. F. Roland
Drawn 270 Medicine Lodge Kan.
(Address)

SUBSCRIBED AND SWORN TO before me this 16 day of Sept., 1966

My commission expires _____
CLYDE L. GIBSON
NOTARY PUBLIC
My Comm. Exp. October 17, 1968

Clyde Gibson
Notary Public.

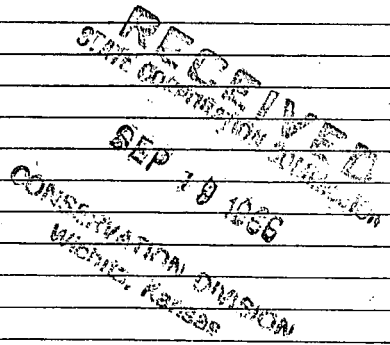

KANSAS GEOLOGICAL SOCIETY
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS

COPY

COMPANY - SIOUX PETROLEUM CO.

SEC 30 T 31 R 10W
 COR C NW NW

FARM McReynolds NO. 1

COUNTY Barber

TOTAL DEPTH 4524'

COMM. 9-8-65

COMP. 9-19-65

SHOT OR TREATED

CONTRACTOR Hallar Drig. Co., Inc.

ISSUED 7-2-66

KANSAS	

CASING

20 10
 15 8 5/8 250' w/260' sx cem.
 12 6
 13 4 4523' w/150' sx cem.

ELEVATION 1727' RB

PRODUCTION Pmp. 5 BOP & 15 BWPD

FIGURES INDICATE BOTTOM OF FORMATIONS

0-150	Sand	
150-250	Shale	
250-1325	Shale & Red Bed & Shells & Salt Section	
1325-1911	Salt Section	
1911-2109	Lime & Spald	TOPS: SCOUT
2109-2258	Lime & chert	Elgin Zone 3533
2258-2852	Lime & shale	Hedberg 3710
2852-2907	Shale & Lime	Douglas shale 3776
2907-3022	Topeka Lime	L/Douglas sand 3850
3022-3306	Lime & Shale	Lansing 3891
3306-3509	Shale & lime	B/Kansas City 4376
3509-3588	Lime & Shale	Mississippi chert 4505
3588-3753	Shale & Lime	
3753-3847	Lime & Shale	
3847-3878	Sand & Shale	
3878-4020	Lime (L.K.C.)	
4020-4078	K. C. Lime	
4078-4158	L. K. C.	
4158-4208	Lime	
4208-4308	K. C. Lime	
4308-4397	Lime	
4397-4461	Marnston Section (Shale & cherty lime)	
4461-4502	Lime (Cherty)	
4502-4520	Mississippian chert	
4520	Rotary Total Depth	
4524	No log	
4524	Total Depth	

RECEIVED
 STATE GEOLOGICAL SURVEY OF KANSAS

AUG 20 1966

STATE OF KANSAS)
) ss
 COUNTY OF SEDGWICK)

D. L. Hellar, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 McReynolds, located in c NW NW 30-31S-10W, Barber County, Kansas, as reflected by the files of the Hellar Drilling Company, Inc.

HELLAR DRILLING COMPANY, INC.

By _____
 President - D. L. Hellar

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 21st day of September, 1965.

Notary Public - Catherine Darcey