
## KANSAS

Rev. 6-9-67

J. P. Roberts Administrator 500 Insurance Building Wichita, Kansas 67202

Intent to Drill, filed June 13, 1967.

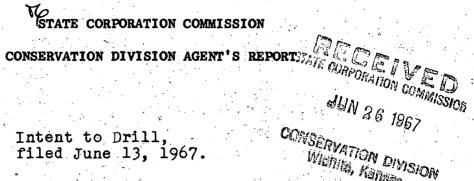

Operator's Full Name Colorado Oil & Gas Company
Complete Address 915 Union National Bldg., Wichita, Kansas 67202
Lease Name Kumberg Well No. # 1-6
Location App. C NE SE Sec. 6 Twp. 31 Rge. 12 (E) (W) W
County Barber Total Depth 3772
Abandoned Oil Well Gas Well Input Well SWD Well D & A X  Other well as hereafter indicated
Plugging Contractor Hellar Drilling Company, Inc.
Address 1014 Union Center Bldg., Wichita, Ks, 67202 cense No.
Operation Completed: Hour 1:45 P.M. Day 24th Month June Year 1967
The above well was plugged as follows:
214' of 8 5/8" surface pipe, cement circulated with 175 sacks. Hole
was filled with drilling mud to 200', 1st cementing plug, bridged with
2 sacks of dry cement and $\frac{1}{2}$ sack of hulls on fluid at 200. and cemented
with 23 sacks. Hole was filled with drilling mud to 40°, 2nd cementing
plug, bridged with 1 sack of dry cement and $\frac{1}{2}$ sack of hulls on fluid at
40', and cemented with 9 sacks to the base of the cellar. Rat hole bridge
and cemented with 2 sacks.
I hereby certify that the above well was plugged as herein stated.

INVOICED

INV. NO. \_