

15-115-20416-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Marion County. Sec. 12 Twp. 19 Rge. 1 E/W
Location as "NE/CNW/SW" or footage from lines
SW SW

Lease Owner George Reed
Lease Name Bartle Well No. 1
Office Address 645 Fourth Financial Center, Wichita, KS
Character of Well (Completed as Oil, Gas or Dry Hole)

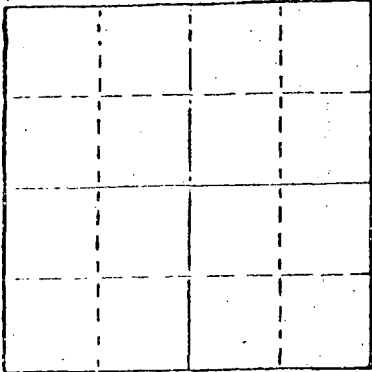

Locate well correctly on above
Section Plat

Dry Hole
Date Well completed 5-8 1978
Application for plugging filed 5-8 1978
Application for plugging approved 5-8 1978
Plugging commenced 5-8 1978
Plugging completed 5-8 1978
Reason for abandonment of well or producing formation

Dry Hole
If a producing well is abandoned, date of last production
----- 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Merle Hickey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2751
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	186	Cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Filled hole with 65 vis rotary mud from T.D. up to 200'
Put in bridge and 18 sacks cement, filled on up to 60'
put in bridge and 15 sacks cement, put 22 sacks cement in
rat hole.

RECEIVED
STATE CORPORATION COMMISSION

MAY 12 1978

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Berentz Drilling Company

STATE OF Kansas COUNTY OF Greenwood, ss.
Jack Berentz (~~employee of xxxxx~~) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.


(Signature)

Jack Berentz
Box 428, Eureka, Kansas 67045
(Address)

SUBSCRIBED AND SWORN TO before me this 10 day of May, 1978

Judy C Davis
Judy C. Davis Notary Public.

My commission expires April 6, 1982



LOG OF WELL

Barble #1
SW-SW
Section 12-19-1E
Marion County, Kansas
Ely. KB 1474

OPERATOR: George Reed

CONTRACTOR: Berentz Drilling Company

Commenced with rotary: 5-3-78

Completed with rotary: 5-8-78

Casing: 8 5/8' ---186' cemented with 150 sacks.

Soil	3
Shale & Lime	85
Lime & Shale	225
Shale & Lime	950
Lime & Shale	1275
Shale & Lime	2139
Lime Lansing-KC	2685
Shale	2729
Chat Miss.	2751 R.T.D.

MAY 12 1978

MISSOURI
DIVISION
KANSAS