

API NUMBER 15-007-21,972-00-00

LEASE NAME Douthett

WELL NUMBER 1-24

SPOT LOCATION NE NW

SEC. 24 TWP. 30 RGE. 11 (X) or ((W))

COUNTY Barber

Date Well Completed 12-28-84

Plugging Commenced 12-28-84

Plugging Completed 12-28-84

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Kan-Ex, Inc.

ADDRESS 110 S. Main-Suite 800, Wichita, Kansas 67202

PHONE # (316) 267-2585 OPERATORS LICENSE NO. 6327

Character of Well D&A
(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? Yes

Which KCC/KDHE Joint Office did you notify? Dodge City, Kansas

Is ACO-1 filed? yes if not, is well log attached? _____

Producing formation _____ Depth to top _____ bottom _____ T.D. 4810'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS | CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used state, the character of same and depth placed, from feet to feet each set. Plugged well with 140 sxs 60/40 poz, 2% gel, 3%cc as follows: 700'-50 sxs; 360'-50 sxs; 40'-10 sxs; rathole-10 sxs; mousehole-10 sxs; water well (top to bottom)-10 sxs. Job by Dowell, ticket #03-06-4808. Complete at 1:15 on December 28, 1984.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Wheatstate Oilfield Services, Inc. License No. 5149
Address P. O. Box 329, Pratt, Kansas 67124

RECEIVED
STATE CORPORATION COMMISSION


STATE OF Kansas COUNTY OF Pratt, ss.

JAN 10 1985

James Easter (employee of operator) or (operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) James A. Easter
(Address) P. O. Box 329, Pratt, Kansas 67124


CONSERVATION DIVISION
Wichita, Kansas



SUBSCRIBED AND SWORN TO before me this 9th day of January 1985

Mary L. Tjaden
Notary Public

My Commission expires: 3/22/88

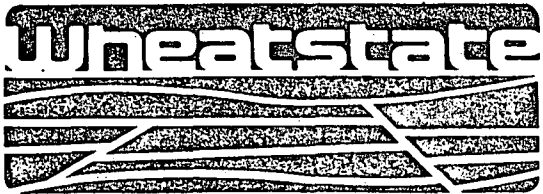

- Rotary Drilling
- Drilling Mud and Chemicals
- Heavy Oil Field Hauling
- Roustabout and Dirt Services
- Well Completion and Servicing Units

Oilfield Services, Inc.

DRILLER'S WELL LOG

Douthett #1-24
 NE NW Sec. 24-30S-11W
 Barber County, Kansas
 Commenced: 12-17-84
 Completed: 12-28-84
 API #15-007-21,972
 Operator: Kan-Ex, Inc.

Depth		Formation	Remarks
From	To		
0	215	Sand, Clay	Ran 7 joints (295') new, 24#, 8rd,
215	570	Red Bed	8 5/8" surface casing. Set at 310' with
570	1000	Red Bed, Shale	185 sxs Common, 2% gel, 3% cc. Job by
1000	1422	Red Bed	Dowell, ticket #767614. Cement did
1422	1830	Shale	circulate. Plug down at 6:45 p.m. on
1830	4810	Lime, Shale T.D.	December 18, 1984.

RTD 4810'

Plugged well with 140 sxs 60/40 poz, 2% gel, 3% cc as follows: 700'-50 sxs; 360'-50 sxs; 40'-10 sxs; rathole-10 sxs; mousehole-10 sxs; water well (top to bottom)-10 sxs. Job by Dowell, ticket #03-06-4808. Complete at 1:15 p.m. on December 28, 1984. State Plugger was Bud Metz out of the Dodge City, Kansas office.

STATE OF KANSAS)
) ss
 COUNTY OF PRATT)

I, the undersigned, being duly sworn on oath, state that the above Driller's Log is true and correct to the best of my knowledge and belief and according to the records of this office.

WHEATSTATE OILFIELD SERVICES, INC.

James A. Easter
 James A. Easter, Operations Coordinator

NOTARY PUBLIC - State of Kansas
 MARY L TJADEN
 My Appt. Exp. 3/22/88

Mary L Tjaden
 NOTARY PUBLIC

My Commission Expires:

3/22/88

RECEIVED
 STATE CORPORATION COMMISSION
 JAN 10 1985
 CONSERVATION DIVISION