

WELL PLUGGING RECORD

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas


OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging off formations.

Barber County. Sec. 21 Twp. 31S Rge. 10 ~~(E)~~ W (W)
 Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW SE NE
 Lease Owner The Vickers Petroleum Co., Inc.
 Lease Name Carter Well No. 1
 Office Address 201 W-K-H Building, Wichita, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) Dry
 Date well completed January 13 19 48
 Application for plugging filed January 13 19 48
 Application for plugging approved January 13 19 48
 Plugging commenced January 13 19 48
 Plugging completed January 13 19 48
 Reason for abandonment of well or producing formation Dry in all formations

NORTH



Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well H. W. Kerr, Great Bend, Kansas
 Producing formation Depth to top Bottom Total Depth of Well 4990 Feet
 Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface		0	220	10-3/4	220	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set plug at 210'. Cemented with 20 sacks of cement. Filled with mud 40'. Set Plug and capped with 10 sacks of cement.

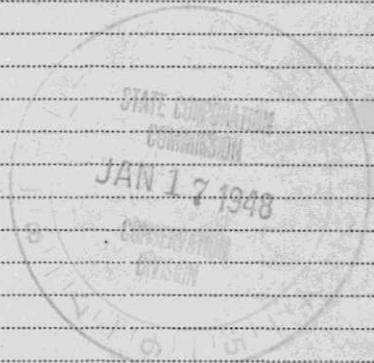

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Vickers Petroleum Co., Inc.
 Address 201 W-K-H Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
 John M. Little (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *John M. Little*
 201 W-K-H Building, Wichita, Kansas
 (Address)

SUBSCRIBED AND SWORN to before me this 16th day of January, 19 48

Allen P. Denton
 Notary Public.

My commission expires August 13, 1949

PLUGGING
 FILE SEC 21 T 31 R 10W
 BOOK PAGE 9 LINE 19

THE VICKERS PETROLEUM CO., INC.

Carter Well #1
SW SE NE 21-31S-10W
Barber County, Kansas

Casing Record:
10-3/4" $\frac{1}{4}$ 220' w/175 sx


Commenced: December 13, 1947
Completed: January 13, 1948

Elevation: 1648 D.F.
D & A

L O G

Surface Sand & Red Bed	0-120	Sand	3687-3772
Red Bed Sand	120-220	Lime	3772-4195
Red Bed, Shells	220-530	Shale & Lime	4195-4435
Red Bed & Shale	530-650	Sand & Shale	4435-4445
Shale & Shells	650-830	Chert & Shale	4445-4480
Red Bed & Shale	830-1085	Shale & Lime	4480-4610
Red Rock & Shale	1085-1110	Chert	4610-4620
Salt	1110-1430	Shale & Lime	4620-4710
Lime	1430-1450	Shale	4710-4742
Shale & Shells	1450-1510	Lime	4742-4815
Lime & Shale, Rough	1510-1565	Shale	4815-4830
Lime Broken	1565-1665	Sand & Shale	4830-4840
Lime	1665-2010	Sand	4840-4850
Sandy Lime, Broken	2010-2032	Shale & Sand	4850-4925
Sand	2032-2050	Dolomite	4925-4990 T.D.
Lime, Broken	2050-2135		
Lime	2135-2245	Tops:	
Lime, Broken	2245-2285	Lansing	3772 D. F.
Lime & Shale	2285-2655	Basal Penn. Sand	4433-4442 D.F. <9
Shale & Lime	2655-2770	Mississippi	4442 D. F.
Lime & Shale	2770-2990	Kinderhook	4635 D. F.
Lime	2990-3365	Chattanooga	4707 D. F.
Lime & Shale	3365-3538	Viola	4740 D. F.
Lime Rough	3538-3570	Simpson	4815 D. F.
Lime & Shale	3570-3615	Simpson Sand	4839-4848 D.F. <9
Lime, Sand	3615-3687	Arbuckle	4925 D. F.
		T. D.	4990
		Schlumberger	

Drill Stem Test 4436-4463
Open 15 min. Recovered 60' mud.
No shows.

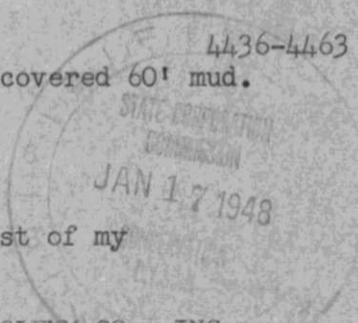

I hereby certify that this log is true and correct to the best of my knowledge and belief.

THE VICKERS PETROLEUM CO., INC.

By H. C. Davis

Subscribed and sworn to before me
this 16th day of January, 1948.

Allen P. Denton
Notary Public

My commission expires August 13, 1949.

