


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217  
NORTH

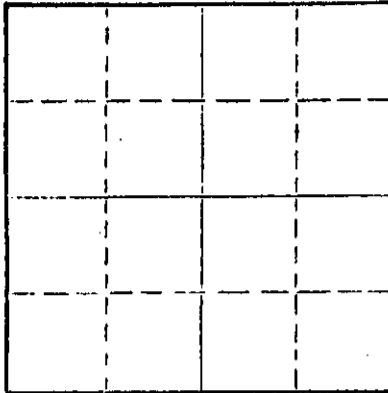

Locate well correctly on above  
Section Plat

Barber County, Sec 2 Twp 30S Rge. (E) 14 (W)  
Location as "NE/CNW&SW" or footage from lines. NE SW SW  
Lease Owner Roger F. Williams  
Lease Name Alexander Well No. 1  
Office Address 11-1/2 Main Street, Chanute, Kansas 66720  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed March 29, 1973  
Application for plugging filed March 29, 1973  
Application for plugging approved March 29, 1973  
Plugging commenced March 29, 1973  
Plugging completed March 29, 1973  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein  
Producing formation Depth to top Bottom Total Depth of Well 4530 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	346'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Put 50 sacks cement through drill pipe with pump truck. Set plug and 1/2 sack hulls at 40 feet and 15 sacks cement to base of well cellar. Plugged rat hole with 2 sacks cement.

RECEIVED  
STATE CORPORATION COMMISSION  
APR 5 1973  
4-5-73  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Graves Drilling Co., Inc.  
Address 505 Union Center, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK ss.  
John C. Graves (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves  
505 Union Center, Wichita, Kansas 67202

Subscribed and Sworn to before me this 3rd day of April, 1973

My commission expires May 9, 1975  
Betty Brandt Notary Public

R O T A R Y D R I L L E R S ' L O G

OPERATOR: Roger F. Willimas DRILLING COMMENCED: March 18, 1973  
 11-1/2 Main Street  
 Chanute, Kansas 66720

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: March 29, 1973  
 505 Union Center  
 Wichita, Kansas 67202

CASING RECORD: 9 Jts. 346' 8-5/8" LOCATION: Alexander No. 1  
 cemented with 400 sacks NE SW SW  
 Section 2-30S-14W  
 Barber County, Kansas

-----

0 - 40	Sod & clay
40 - 120	Sand
120 - 310	Red Bed
310 - 1710	Shale & shells
1710 - 1733	Shale
1733 - 2222	Shale & lime
2222 - 2577	Lime
2577 - 2830	Lime & shale
2830 - 3194	Shale & lime
3194 - 3816	Lime
3816 - 4042	Lime & shale
4042 - 4378	Lime
4378 - 4435	Lime & shale
4435 - 4475	Lime, shale & chert
4475 - 4514	Lime & chert
4514 - 4524	Lime & shale
4524 - 4530	Sand
4530	Rotary Total Depth

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By John Graves

STATE OF KANSAS )  
 ) ss.  
 SEDGWICK COUNTY )

Subscribed and sworn to before me, a Notary Public, this 3rd of April, 1973.

Betty Brandt  
 Betty Brandt Notary Public

My commission expires: May 9, 1975