


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Abbreviat  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
300 Bittling Building  
Wichita, Kansas

NORTH

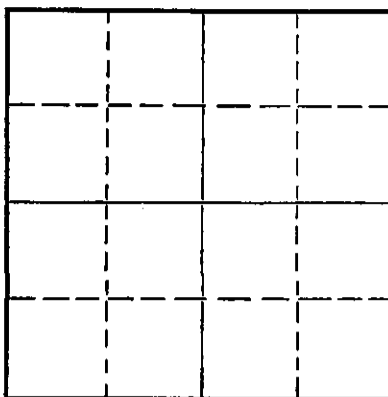

Locate well correctly on above  
Section Flat

Barber County. Sec. 2 Twp. 30S Rge. 14 (E) W (W)  
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE NW NE  
Lease Owner Rine, Roberts & Murphy and Buak  
Lease Name Kiras Well No. 2  
Office Address 320 Central Bldg., Wichita 2, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed August 4, 19 50  
Application for plugging filed August 4, 19 50  
Application for plugging approved August 4, 19 50  
Plugging commenced August 4, 10:00 A.M. 19 50  
Plugging completed August 4, 12:30 P.M. 19 50  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes. Via telephone

Name of Conservation Agent who supervised plugging of this well C. D. Stough, Dist. Plugging Supervisor  
Producing formation Depth to top Bottom Total Depth of Well 4550 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Set In	Pulled Out
Surface	Clay & Sand	0	140'			
Red Bed	Same	140'	370'	8-5/8"	370'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud from total depth to 250'

Wood plug 30' w/ 10 Sacks Cement

Heavy mud from plug @ 250' to 30'

Bottom plug at 250' w/ 15 sacks cement

AUG 10 1950  
8-10-50  
ST. ...  
COMMISSION  
KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to R. W. RINE DRILLING COMPANY  
Address 320 Central Bldg., Wichita 2, Kansas


STATE OF Kansas, COUNTY OF Sedgwick, ss.  
Clyde W. Goddard (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Clyde W. Goddard  
320 Central Bldg., Wichita 2, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this August 4 day of 1950

R. M. Green  
Notary Public.

My commission expires Dec. 29, 1952



Kiras Well No. 2

NE NW NE  
Sec. 2-30S-14W  
Barber County  
Kansas

Contractor: The R. W. Rine Drilling Co.  
Started 7/20/50 Finished 8/4/50

LOG

Clay, Sand & Gravel	0	•	140		
Red Bed	140	•	370	3 5/8" Csg. @ 370' w/ 125 Sxs	
Red Bed & Shale	370	•	480		
Shale & Shells	480	•	1500	Syfo @ 500'	• 3'
Silt, Shale & Shells	1500	•	1690	Syfo @ 1000'	• 0'
Shale, Shells	1690	•	1900	Syfo @ 1500'	• 1'
Lime (sandy)	1900	•	2085	Syfo @ 2000'	• 1 1/2'
Lime	2085	•	2340		
Sandy Lime	2340	•	2440		
Shale	2440	•	2485		
Lime, Shale	2485	•	3480	Syfo @ 2925'	• 1/2'
Lime (broken) & Shale	3480	•	3520	Syfo @ 3000'	• O.K.
Lime	3520	•	3738		
Shale	3738	•	3775		
Lime, Sand & Shale	3775	•	3895		
Lime, Shale	3895	•	3950		
Lime (hard)	3950	•	4482	Syfo @ 4000'	• 1/2'
Cherty lime	4482	•	4550	T.D. D&A	

Tops:

Hoehner	5788
Douglas	5988
Kansas City Brown Lime	5925
Kansas City White Lime	5935
Conglomerate	4334
Viola	4410?
Simpson Zone	4430
Arbuckle	4522

I, Clyde W. Goddard, do hereby certify that the above is a true and accurate log of the Kiras Well No. 2, located in the NE NW NE of Sec. 2-30S-14W, Barber County, Kansas.

Clyde W. Goddard

Subscribed to and sworn before me this 4th day of August, 1950.

R. M. Green  
Notary Public

My commission expires Dec. 29, 1952

**PLUGGING**  
WELL SEC 2 T 30 R 14W  
BOOK PAGE 20 LINE 2

**RECEIVED**  
Conservation Div.  
AUG 10 1950  
STATE CORPORATION  
COMMISSION  
KANSAS