

15-007-20363-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Barber County, Sec. 3 Twp. 31S Rge. 11W (E) (W)

Location as "NE/CNW/SE" or footage from lines 150' NE of C NE SW

Lease Owner Brandt Oil Company

Lease Name Mease Well No. 1

Office Address 9505 W. Central Suite 104, Wichita, Ks. 67212

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed November 25, 1975 19

Application for plugging filed November 25, 1975 19

Application for plugging approved November 25, 1975 19


Plugging commenced November 25, 1975 19

Plugging completed November 25, 1975 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

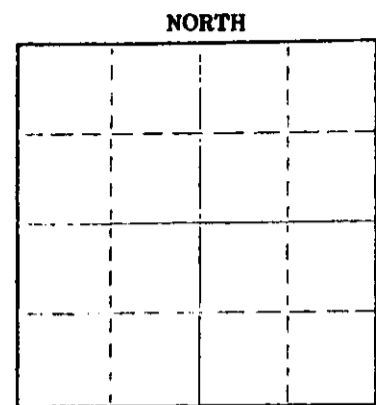

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well George Russel Bieberstine

Producing formation Depth to top Bottom Total Depth of Well 4864

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	229'	8 5/8"		

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged throught drill pipe heavy mud from 4864 to 200'
Plugged at 200' w/35 sacks cement; mud to 40'
1/2 sack hulls and a plug bridge, 15 sacks cement to base of cellar. Two sacks cement in rathole. Job by Sun Cementing.

RECEIVED
STATE CORPORATION COMMISSION

Name of Plugging Contractor EXPLOR Drilling Co. (If additional description is necessary, use BACK of this sheet)

Address

DEC 2 1975
12-2-75

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK ss. B. G. Harrelson (employee of owner) or (owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) B. G. Harrelson

434 N. Market, Suite 110, Wichita, Ks. 67202 (Address)

SUBSCRIBED AND SWORN TO before me this 26th day of November 1975

My commission expires August 5, 1979

Virginia S. Fabian Notary Public



WELL LOG

#1 MEASE
 150' NE of C NE SW
 Section 3-31S-11W
 Barber County, Kansas

OPERATOR: Brandt Oil Company
 CONTRACTOR: XPLOR Drilling Co.

COMMENCED: 11-14-75
 COMPLETED: 11-25-75

CASING RECORD: Set 6 joints used 28# 8 5/8" @ 229' w/175 sacks common cement,
 2% gel, 3% Calcium chloride

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>ELEVATION</u>
Surface Soil	0	40	1804 Gr.
Sandy Clay	40	145	1809 D.F.
Red Bed	145	231	1812 K.B.
Shale	231	1550	
Lime & Shale	1550	4005	
Lime	4005	4542	
Shale	4542	4647	
Lime & Shale	4647	4750	
Lime & Cherty Lime	4750	4842	
Lime	4842	4864	
R. T. D.	4864		

DEC 2 1975
 12-2-75
 COUNTY OF SEDGWICK

STATE OF KANSAS)
) SS:
 COUNTY OF SEDGWICK)

I certify that this is a true and correct copy of the Driller's Log of the well drilled in the 150' NE of C NE SW, Section 3-31S-11W, Barber County, Kansas, to the best of my knowledge and belief.

XPLOR DRILLING CO.

B. G. Harrelson
 B. G. Harrelson, Office Manager

Subscribed and sworn to before me this 1st day of December, 1975.

MY COMMISSION EXPIRES:
 August 5, 1979

Virginia S. Fabian
 Virginia S. Fabian, Notary Public

