


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
State Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
North

Barber County, Sec. 19 Twp. 32S Rge. 6 (X) 11 (W)
Location as "NE/CN/WS/W" or footage from lines C SE NE
Lease Owner: Graves Drilling Co., Inc.
Lease Name: Bumgarner Well No. 1
Office Address: 910 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 6, 1975
Application for plugging filed December 6, 1975
Application for plugging approved December 6, 1975
Plugging commenced December 6, 1975
Plugging completed December 6, 1975
Reason for abandonment of well or producing formation

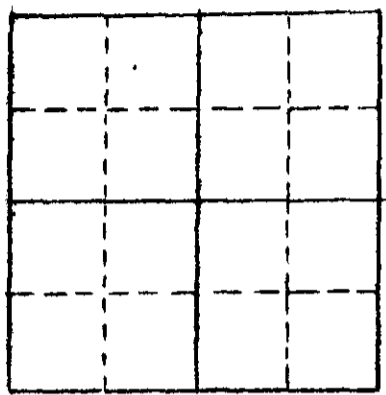

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 18
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein, Attica, Kansas
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	240'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pumped 35 sacks cement through drill pipe to 200'. Pushed plug and 1/2 sacks bulls to 40'. Pumped 15 sacks cement to base of well cellar. Plugged ratthole with 2 sacks cemet.

12-10-75

Name of Plugging Contractor: Graves Drilling Co., Inc.
Address: 910 Union Center Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK ss.
John C. Graves (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves
910 Union Center, Wichita, Kansas 67202 (Address)

SUBSCRIBED AND SWORN to before me this 8th day of December 1975

My commission expires May 9, 1979
Betty Brandt Notary Public

ROTARY DRILLERS' LOG

OPERATOR: Graves Drilling Co., Inc. DRILLING COMMENCED: November 25, 1975
910 Union Center
Wichita, Kansas 67202

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: December 6, 1975
910 Union Center
Wichita, Kansas 67202

CASING RECORD: 6 Jts. 240' of 8 5/8" cemented with 225 sacks LOCATION: Bumgarner No. 1
C SE NE
Section 19-32S-11W
Barber County, Kansas

0 - 240	Sand & redbed
240 - 540	Redbed, shale & shells
540 - 1425	Shale
1425 - 1715	Shale & shells
1715 - 1846	Lime & shale
1846 - 3170	Shale & lime
3170 - 3500	Lime shale & sand
3500 - 3568	Sand
3568 - 3600	Lime
3600 - 3725	Lime & shale
3725 - 3885	Lime
3885 - 4000	Lime & shale
4000 - 4195	Lime
4195 - 4280	Lime, shale, and chert
4280 - 4340	Lime & chert
4340	Lime and chert
4340	RTD

RECEIVED
STATE OF KANSAS COMMISSIONER OF
DEC 10 1975
12-10-75
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By Phil Barnes
President

STATE OF KANSAS)
CITY BRANCH) SS
SEDWICK COUNTY)
NOTARY PUBLIC
December 1975
SEDWICK CO. KANS.

Subscribed and sworn to before me, a Notary Public, this 8th day of

My commission expires: May 9, 1979

Betty Brandt
Betty Brandt Notary Public