

KANSAS

Form CP-3
Rev. 6-4-68

STATE CORPORATION COMMISSION

CONSERVATION DIVISION AGENT'S REPORT

J. Lewis Brock
Administrator
P. O. Box 17027
Wichita, Kansas 67217

RECEIVED
STATE CORPORATION COMMISSION
JUL 29 1974
CONSERVATION DIVISION
Wichita, Kansas

Operator's Full Name Glen Rupe
Complete Address 200 W Douglas Wichita, KS
Lease Name House Well No. 1-OWWO
Location SE/SE/NW Sec. 22 Twp. 30 Rge. 12 (E) (W) W
County Barber Total Depth 4767
Abandoned Oil Well Gas Well X Input Well SWD Well D & A
Other well as hereafter indicated
Plugging Contractor Knight Casing Pulling Co Inc
Address Box 405 Chase, KS License No. 436
Operation Completed: Hour 4:00 PM Day 27 Month 7 Year 1974

The above well was plugged as follows:

405 ft 8 5/8 surface cemented with 200 sacks. 4413 ft 5 1/2 long string
cemented with 200 sacks. Open hole. Sand to 4400 ft, 5 sacks cement
with bailer. Pulled 1762 ft 5 1/2. Set 10 ft rock bridge at 360 ft.
Fill hole with 6 yds redimix to surface.

I hereby certify that the above well was plugged as herein stated.

INVOICED

Signed: [Signature]
Well Plugging Supervisor

DATE 7/29/74

INV. NO. 9614-W

SUN OILWELL CEMENTING, INC.
TEMPERATURE SURVEY
GREAT BEND, KANSAS

Company Glen Pope Date 2-14-73


Well No. "1" Lease House County Barber Sec. 22 Twp. 30 Rge. 12

Depth of well 4772 Depth of Csg. Cmtd. 4413 Size Csg. used 5 1/2 Size of Hole 7 7/8

Amount of Cement 225 5/8 Poz 4% Gel + 175 5/8 Poz 2% Gel, 10% Salt & 8 lbs G-ls.

Surveyed from 1500 to 3190 at 100' a minute Cement Top 1853

Remarks Stags Collar at 3250 Cement Leften Pipe

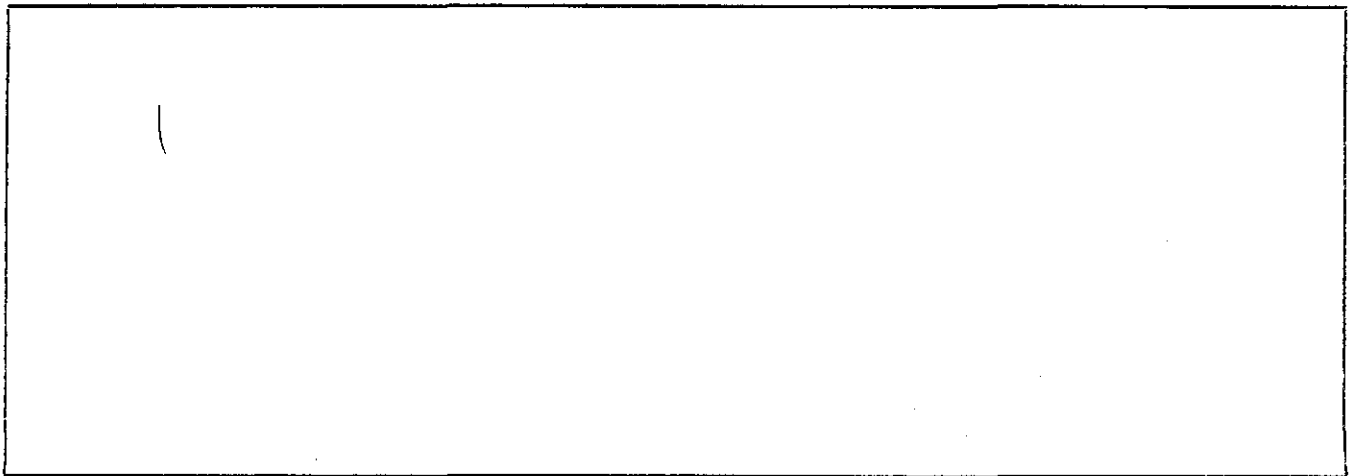

RECEIVED
STATE CORPORATION COMMISSION
APR 4 - 1974
CONSERVATION DIVISION
Wichita, Kansas