

15-007-30223-0000

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 24 Twp. 31S Rge. 11W (E) (W)

Location as "NE/CNW/SW" or footage from lines C NE SE

Lease Owner Sioux Petroleum Company

Lease Name Shepherd Well No. 3

Office Address c/o W.F. Roland, 104 Kansas, Medicine Lodge, Ks.

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 12-28-65 19

Application for plugging filed 12-28-65 19

Application for plugging approved 12-28-65 19


Plugging commenced 12-28-65 19

Plugging completed 12-28-65 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

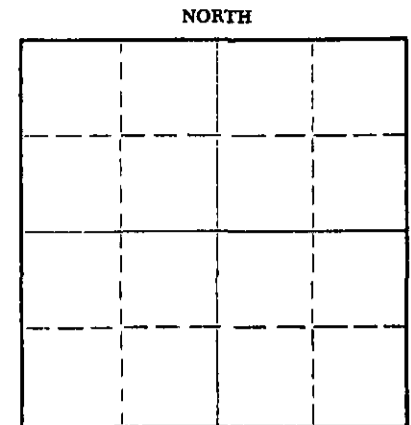

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie Elving, Pratt, Ks.

Producing formation Depth to top Bottom Total Depth of Well 4570 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	212'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom hole plug @ 200' with 1/2 sk. hulls 25 sks. cement
Set Plug w/ 1/2 sk. hulls & 9 sks. cement @ 40'

RECEIVED
STATE CORPORATION COMMISSION
JAN 3 1966
1-3-66
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Leben Drilling, Inc.

Address Box 486, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
Leslie Kite

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leslie Kite

P. O. Box 486, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 30th day of December, 1965

Ulanda Nichols Notary Public.

My commission expires April 1, 1967

DRILLER'S LOG

COMPANY: Sioux Petroleum Company
 CONTRACTOR: LEBEN DRILLING, INC.
 FARM: SHEPHERD #3
 LOCATION: C NE SE Sec. 24-31S-11W
 BARBER COUNTY, KANSAS
 COMMENCED: 12-15-65
 COMPLETED: 12-28-65

0	105	Sand, Clay
105	212	Redbed
212	725	Redbed, Shale
725	1660	Shale
1660	1835	Lime
1835	2320	Lime, Shale
2320	2965	Shale
2965	3170	Lime, Shale
3170	3440	Chalky Lime, Shale
3440	3935	Lime, Shale
3935	4450	Lime
4450	4485	Lime, Shale
4485	4537	Lime
4537	4553	Chert
4553	4570	Chert, Lime
	<u>4570</u>	<u>RTD - D. & A.</u>

RECEIVED
 CONSERVATION DIVISION
 JAN 3 1966
 1-3-66
 CONSERVATION DIVISION
 TOPEKA, KANSAS

Set 8 5/8" used surface casing @ 212' with 200 sacks 60-40 Posmix
 Sunset 2% Gel

I, Leslie Kite, do hereby certify that the above and foregoing is a true and correct copy of the log of the Shepherd #3 well, located C NE SE Section 24, Township 31 South, Range 11 West, Barber County, Kansas, as reflected by the records of Leben Drilling, Inc.

Leslie Kite
 Leslie Kite

STATE OF KANSAS)
) SS
 COUNTY OF BARTON)

Subscribed and sworn to before me, a Notary Public, in and for Barton County, Kansas, this 30th day of December, 1965.

Ulanda Nichols
 Ulanda Nichols

My Commission Expires:
 April 1, 1967