

15-077-20642-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Harper County, Sec. 29 Twp. 325 Rge. 8-W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines

C-NE SE SW

Lease Owner Texas Oil & Gas
Lease Name Stocker Well No. 1

Office Address 200 W. Douglas, Suite 300, Wichita, Ks
Character of Well (Completed as Oil, Gas or Dry Hole) 67202
Gas

Date Well completed 12-8 1980
Application for plugging filed 6-8 1981
Application for plugging approved 6-10 1981
Plugging commenced 8-5 1981
Plugging completed 8-7 - 2:15 1981

Reason for abandonment of well or producing formation
not productive

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leslie - Barnett on location

Producing formation Depth to top Bottom Total Depth of Well 3850

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	300'	None
				2 7/8	3840	3005

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Allied pumped in 10 sacks common cement. Stopped plugging at 3400'.

Shot pipe off at 3005'. Pulled and layed down.

Allied pumped in 15 - gel
8 - Hull
10 - gel
125 sacks 50-50 POZ 4 1/2 gel 3-CC

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Clarke Corporation

RECEIVED
STATE CORPORATION COMMISSION
AUG 15 1981
CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas COUNTY OF Barker, ss.
Chuck R. Morquester (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Chuck R. Morquester
Medicine Lodge, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of August, 1981

Jessie Hammett
Notary Public.

My commission expires April 4, 1982

DRILLERS LOG

RECEIVED
STATE CORPORATION COMMISSION
JUN 10 1981
CONSERVATION DIVISION
Wichita, Kansas

OPERATOR: Texas Oil & Gas Corp.
200 West Douglas
Wichita, Kansas 67202

WELL NAME: Stocker #1
C NE SW Sec. 29-32S-8W
Harper County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
200 Douglas Building
Wichita, Kansas 67202

COMMENCED: 11/28/80

COMPLETED: 12/8/80

RTD: 3850'

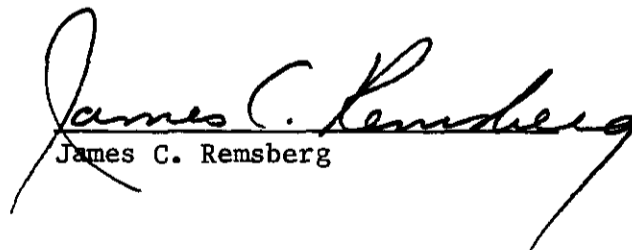
SURFACE CASING: 8-5/8" set at 300' with 250 sx

PRODUCTION CASING: 2-7/8" set at 3840' with 200 sx


0' to 410' Red Bed
410' to 750' Shale
750' to 1276' Red Bed & Shale
1276' to 1298' Shale
1298' to 1370' Lime & Shale
1370' to 1582' Shale
1582' to 3671' Lime & Shale
3671' to 3710' Stalnaker
3710' to 3850' Lime & Shale
RTD 3850'

STATE OF KANSAS
COUNTY OF SEDGWICK

I, James C. Remsberg, of the Slawson Drilling Company, Inc. hereby state the above is an accurate copy of the Stocker #1 log for Texas Oil & Gas Corp.


James C. Remsberg

Subscribed and sworn to me
this 29th day of December, 1980


Mary Lou Taylor, Notary

My commission expires January 17, 1985

