


15-072-20M8-00-00

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 1 1972  
CONSERVATION DIVISION  
Wichita, Kansas  
Form CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

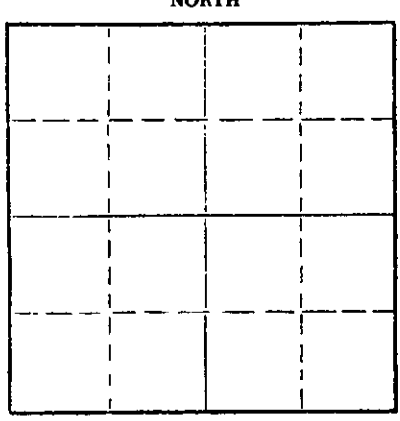

Locate well correctly on above  
Section Plat

Harper County, Sec. 30 Twp. 32S Rge. 8 (E) 8 (W)  
Location as "NE/CNW&SW" or footage from lines NE SE SW  
Lease Owner The Pickens Company, Inc.  
Lease Name Antrim Well No. 1  
Office Address 800 Preston Bank Bldg., Dallas, Texas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed May 27, 19 72  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced May 27, 19 72  
Plugging completed May 27, 19 72  
Reason for abandonment of well or producing formation Dry Hole  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (Russell Biberstein of Attica)

Name of Conservation Agent who supervised plugging of this well  
Producing formation Depth to top Bottom Total Depth of Well 4793 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	289'	8-5/8"	289'	None
	Casing					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy Mud from Total Depth to 300 Feet.  
40 sax cement plug; Mud to 40 Feet, 1/2 sax  
hulls, plug bridged and 15 sax cement to  
base of cellar; 2 sax cement in rat hole.  
Job completed @ 8:00 A.M.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor HOWCO  
Address Box 693, Pratt, Kansas 67124

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Clarence Michael of Sage Drilling Co. (employee of owner or contractor or operator) of the above described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Clarence Michael  
500 Bitting Bldg., Wichita, Kansas 67202  
(Address)



Subscribed and Sworn to before me this 31st day of May, 19 72  
Louise K. Whitted - Notary Public.  
My commission expires November 26, 1974

RECEIVED  
 STATE CORPORATION COMMISSION  
 JUN 1 1972  
 CONSERVATION DIVISION  
 Wichita, Kansas

DRILLERS LOG  
ANTRIM NO. 1


CASING RECORD: OPERATOR: The Pickens Company, Inc. DESCRIPTION:  
 8-5/8" @ 289' CONTRACTOR: Sage Drilling Co., Inc. NE SE SW  
 w/225 sax cement COMMENCED: May 15, 1972 Sec. 30-32S-8W  
 Harper Co., Kansas  
 TOTAL DEPTH: COMPLETED: May 27, 1972 ELEVATION: 1451KB  
 4793'

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Soil & Shale	0	225	
Shale	225	325	
Shale & Red Bed	325	1058	
Anhydrite	1058	1098	
Shale & Lime	1098	1295	
Broken Lime & Shale	1295	1645	
Lime & Shale	1645	1720	
Lime w/Shale Streaks	1720	1860	
Lime & Shale	1860	2045	
Shale & Lime	2045	2699	
Lime & Shale	2699	3710	
Sand	3710	3770	
Lime	3770	3890	
Lime & Shale	3890	4005	
Lime	4005	4225	
Lime & Shale	4225	4308	
Lime	4308	4382	
Lime & Shale	4382	4385	
Lime	4385	4430	
Chert, Lime & Shale	4430	4500	
Cherty Lime	4500	4622	
Shale	4622	4660	
Shale & Lime	4660	4700	
Lime	4700	4734	
Shale & Lime	4734	4793	D&A

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By Clarence Michael  
 Clarence Michael



Subscribed and sworn to before me this 30th day of May, 1972.

Louise K. Whitted  
 Louise K. Whitted - Notary Public

My commission expires:  
 November 26, 1974.