

RECEIVED

STATE CORPORATION COMMISSION

Form CP-4


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to

28194 6-28-74

WELL PLUGGING RECORD

CONSERVATION DIVISION

P. O. Box 17027 Wichita, Kansas 67217  
Barber County, Sec. 15 Twp. 30S Rgs. 12W (E) (W)

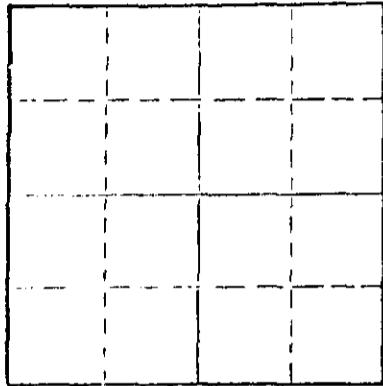

Locate well correctly on above Section Plat

Location as "NE/CNW&SW" or footage from lines NW SW NW  
Lease Owner Cameron K. Reed  
Lease Name House Well No. 5  
Office Address P.O. Box 10103, Kansas City, Mo. 64111  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed October 5, 1967  
Application for plugging filed May 29, 1974  
Application for plugging approved May 30, 1974  
Plugging commenced June 13, 1974  
Plugging completed June 25, 1974  
Reason for abandonment of well or producing formation Not Comm.

If a producing well is abandoned, date of last production June 10, 1974  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein  
Producing formation Viola Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4494 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	360	None
				5 1/2	4483	2230

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Sand From 4494 to 4470  
Dumped 5 sacks cement with Dump Bailer. Cement from 4470 to 4435.  
Ripped at 3000, 2700, 2400, and 2230.  
Wood Bridge at 200'. Then Rock from 200 to 190'.  
3 yards of Ready Mix.

Name of Plugging Contractor Clarke Corporation  
Address Box 187, Medicine Lodge, Kansas 67104

STATE OF Kansas COUNTY OF Barber, ss.  
Clara Mergenthorpe (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Clara Mergenthorpe  
Medicine Lodge, Kas. 67104  
(Address)

Subscribed and Sworn to before me this 30th day of June 1974  
April 4, 1972  
My commission expires \_\_\_\_\_  
Jessie Hamilton  
Notary Public.



67 15-007-20037

10-45

OPER.: CAMERON K REED  
KANSAS CITY, MO.

WELL : #5 HOUSE

CONTR: STRATA DRIG.

FIELD: AMBER MILLS FIELD (VI)

I.P. : CO P 25 BOPD / 70% WTR, VI 4483-4494  
API # 15-007-20,037

S.T.R.: 15-30S-12W  
SPOT : NW SW NW  
COUNTY: Barber, Ks.  
ELEV : 1819 KB

Geol: Larry Tenk

SPUD: 8-25-67 8 5/8" 360/700 sx  
DST #1 (VI) 4484-94, OP 5", GTS/2", SI 30", PK 1 hr. SI 30",  
GA 2,000,000 cpgpd/5", GA 77,000 ofgpd/lhr,  
R 200' MDY 0 / 180' SW, ISIP 1548#/30", FP 335-168#  
FISP 1537#/30"

RTD 4494 Log 5 1/2" 4483/200 sx  
CO 4494, FU 300' 0 / 300' OCMU / 600' SW/14 hrs.,  
12 bfph, /6 hrs, 10% oil POP, CO P 25 BOPD / 70% wtr

VI 4483-4494, COMPLETED 10-4-67

KB LOG TOPS

TOP 3324 -1505  
HE 3692 -1873  
DG SH 3722 -1903  
DG SD 3768 -1949  
BL 3856 -2037  
LKC 3870 -2051  
MISS 4346 -2527  
KH 4365 -2546  
VI 4484 -2665  
LTD 4494 -2675

GEOL.: Larry Tenk  
ELEV : 1817 DF  
1814 GR  
SPUD DATE: 8-25-67  
FR by DATA: 8-15-67  
COMP by : 10-05-67

CSG: 8-5/8" 360/700 sx  
5-1/2" 4483/200 sx

*Top 4374*

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 31 1974  
CONSERVATION DIVISION  
Wichita, Kansas