


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH



Locate well correctly on above
Section Flat

Barber

County. Sec. 13 Twp. 30S Rge. 12 (XX) (W)

Location as "NE/CNWxSWx" or footage from lines NW SE NW

Lease Owner Carter and Mandell Company

Lease Name McIntire Well No. 1

Office Address Lubbock, Texas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 25 19 65

Application for plugging filed July 30 19 65

Application for plugging approved July 25 19 65

Plugging commenced July 25 19 65

Plugging completed July 25 19 65

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes, verbally

Name of Conservation Agent who supervised plugging of this well

Producing formation Depth to top Bottom Total Depth of Well 4639 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. Row 1: SIZE 8-5/8", PUT IN 320.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with heavy mud to 300'
Set first plug at 300' with 25 sacks

Filled with heavy mud to 40'
Set second plug at 40' with 10 sacks
2 sacks in rat hole

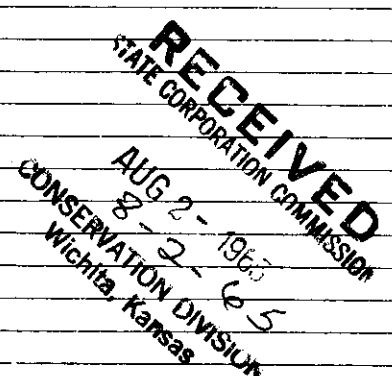

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bowers Drilling Company, Inc.

Address 1434 Wichita Plaza, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss. Emil E. Bowers (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Emil E. Bowers
1434 Wichita Plaza, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 30th day of July, 19 65

My commission expires May 1, 1966

Donna F. Miller, Notary Public.



WELL LOG

COMPANY: Carter & Mandell Company
CONTRACTOR: Bowers Drilling Company, Inc.
FARM: McIntire #1
LOCATION: NW SE NW Section 13-30S-12W
Barber County, Kansas

COMMENCED: July 12, 1965
COMPLETED: July 25, 1965
ELEVATION: 1817 K. B.

0 - 935	Redbed	
935 - 1555	Shale and shells	Set 8-5/8" casing at 320 with 275 sacks
1555 - 4087	Lime and shale	cement
4087 - 4127	Lime	
4127 - 4162	Lime and shale	
4162 - 4245	Lime	
4245 - 4300	Lime and shale	
4300 - 4377	Lime	
4377 - 4546	Lime and shale	
4546 - 4573	Lime, shell and chert	
4573 - 4613	Lime	
4613 - 4633	Lime and Simpson Sand	
4633 - 4639	Simpson Sand	
4639	T. D.	

RECEIVED
STATE CORPORATION COMMISSION

AUG 2 - 1965

CONSERVATION DIVISION
Wichita, Kansas

LOG TOPS:

Heebner	3681	Kinderhook	4387
Lansing/KC	3866	Viola	4552
Mississippi	4341	Simpson	4628

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

I, Emil E. Bowers, do hereby certify that the above and foregoing is a true and correct copy of the copy of the log of the McIntire #1 located NW SE NW Section 13-30S-12W, Barber County, Kansas, as reflected by the files of Bowers Drilling Company, Inc.

Emil E. Bowers

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 30th day of July, 1965.

Donna F. Miller
Donna F. Miller, Notary Public

My commission expires May 1, 1966.