

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 North Market, Insurance Bldg.  
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 14 Twp. 30 Rge. 12 (E) (W)

Location as "NE/CNW/SW" or footage from lines. C SE NW

Lease Owner Mack Oil Company

Lease Name Kimberg Well No. 1

Office Address 812 Union Center, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry

Date well completed 10-13 19 61

Application for plugging filed 10-13 19 61

Application for plugging approved 10-13 19 61


Plugging commenced 10-13 19 61

Plugging completed 10-18 19 61

Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production None 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

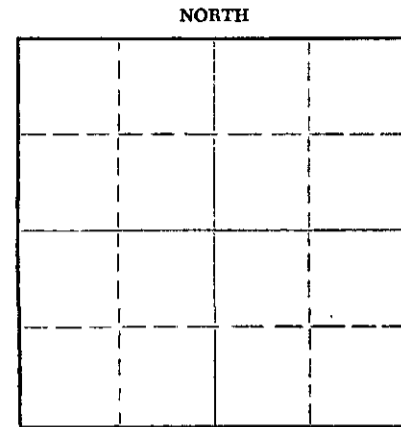

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well

Producing formation None Depth to top Bottom Total Depth of Well 4635 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Sand & Gravel	Water	0	280	8 5/8	280	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set 20 sacks from 210' to 270'  
Set 2 sacks hulls and mud and 10 sacks cement  
from 35' to 0'. Capped with steel cap.

RECEIVED  
STATE CORPORATION COMMISSION  
OCT 21 1961  
CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Mack Oil Company

Address Box 471, Duncan, Oklahoma

STATE OF Kansas COUNTY OF Sedgwick ss.

Robert L. Harris (employee of owner) or (contractor/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Robert L. Harris

812 Union Center, Wichita, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of October, 19 61

Ludwig Paul Buschman  
Notary Public.

My commission expires September 8, 1963



MACK OIL COMPANY  
Duncan, Oklahoma

DRILLERS WELL LOG

Kumberg #1

C SE NW Sec. 14-30-12  
Barber County, Kansas  
Elevation: 1809 K.B.  
Initial Production: Dry  
Contractor: Mack Oil Co.

Commenced R.D.: 9-25-61  
Completed R.D.: 10-13-61  
Total Depth: 4635'

Casing Record: 280' 8 5/8" Surface Casing

<u>STRATA</u>	<u>DEPTH</u>
Surface Hole	0 - 290
Shale and Sand	290 - 775
Shale and Lime	775 - 1196
Shale	1196 - 1418
Shale and Sand	1418 - 1694
Shale and Lime	1694 - 1838
Lime and Sand	1838 - 1887
Shale, Sand and Lime	1887 - 2033
Shale, Sand and Chert	2033 - 2119
Lime and Sand	2119 - 2263
Lime and Shale	2263 - 2343
Lime, Shale and Sand	2343 - 2977
Shale and Lime	2977 - 3703
Lime and Sand	3703 - 3728
Shale, Sand and Lime	3728 - 3770
Lime and Shale	3770 - 3867
Lime	3867 - 3883
Lime and Chert	3883 - 3912
Shale, lime and Chert	3912 - 3941
Lime and Shale	3941 - 3980
Lime	3980 - 4070
Lime and Chert	4070 - 4104
Lime	4104 - 4301
Lime, Shale and Chert	4301 - 4335
Lime and Chert	4335 - 4400
Shale and Lime	4400 - 4521
Lime	4521 - 4545
Lime and Shale and Chert	4545 - 4564
Lime and Chert	4564 - 4602
Lime, Chert and Sand	4602 - 4620
Sand	4620 - 4635

NOV 15 1961  
STATE CORPORATION COMMISSION  
DEP 21  
CONSERVATION DIVISION  
Topeka, Kansas

I hereby certify that the above is a true and correct log of said well as reflected by the daily drilling reports.

MACK OIL COMPANY

By Robert L. Harris

Signed and sworn to in my presence this 16th day of October, 1961,  
by Robert L. Harris, representative of Mack Oil Company.

Eudora Rae Barackman  
Eudora Rae Barackman  
Notary Public

My commission expires September 8, 1963.