

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Biltong Building  
Wichita, Kansas

Baber County. Sec. 27 Twp. 30 Rge. (E) 13 (W)  
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. 380' from W. line 330' From N 11  
Lease Owner. Harbar Drilling Co. ~~1111~~  
Lease Name. Willian Well No. I  
Office Address. 1019 Central Bldg.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed. 11/4/46 19  
Application for plugging filed. 6/12/47 Verbal 19  
Application for plugging approved. 6/12/47 Verbal 19  
Plugging commenced. 6/12/47 19  
Plugging completed. 6/17/47 19  
Reason for abandonment of well or producing formation. Dry Hole  
If a producing well is abandoned, date of last production. X 19  
Was permission obtained from the Conservation Division or its agents before plugging was com-  
menced? Yes

NORTH



Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well. H.W. Kerr  
Producing formation. None Depth to top. Bottom. Total Depth of Well. 4617 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
<u>1 S/W 1/4</u>						
<u>Sand &amp; gravel</u>	<u>dry</u>	<u>0</u>	<u>180</u>			
<u>Red Beds &amp; shales</u>	<u>dry</u>	<u>180</u>	<u>750</u>	<u>10 3/4</u> <u>7"</u>	<u>785</u> <u>4505</u>	<u>None</u> <u>3384'</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled 115' open hole with crushed rock and dumped 5 sacks cement on top of it.  
Mudded hole with heavy mud to 300' of top. Set bridge and dumped 15 sacks cement.  
Filled hole with heavy mud to 20' of top and filled remainder of hole and bottom of cellar with 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Harbar Drilling Company  
Address. 1019 Central Bldg.  
Wichita Kansas

STATE OF Kansas, COUNTY OF Barton  
(employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me, God.

(Signature)

Paul R. Seizer

(Address)

SUBSCRIBED AND SWORN to before me this 26th day of June 1947

Roy Gillis  
Notary Public.

My commission expires. 9-4-50

PLUGGING  
FILE SEC 27 T 30 R 13W  
BOOK PAGE 116 LINE 16

HARBAR DRILLING COMPANY

WILLAN #1

27-30-13 W, Barber County, Kansas

Rigging up rotary tools 9-6-46


Tearing out rotary 10-14-46

Ran 787' of 10-3/4" surface pipe set at 775 with 300 sacks of cement.

Ran 4519' of 7" OD Casing set at 4502', cemented with 75 sacks of cement.

FORMATION	FROM	TO
Sand & Gravel	0	70
Sand	70	120
Red Bed & Shells	120	300
Sand	300	375
Shale & Shells	375	730
Shale & Shells	730	850
Shale	850	952
Shale & Shells	952	1400
Salt & Shells	1400	1480
Salt & Shale	1480	1540
Shale & Shells	1540	1900
Lime	1900	2140
Shale	2140	2185
Lime & Shale	2185	2230
Broken Lime	2230	2330
Lime & Shale	2330	2465
Lime	2465	2540
Shale & Lime	2540	2595
Lime	2595	2613
Sand	2613	2632
Lime & Shale	2632	2665
Shale & Lime	2665	3060
Shale	3060	3070
Lime	3070	3220
Shale	3220	3265
Lime	3265	3390
Soft Lime	3390	3405
Med. Soft Lime	3405	3420
Lime & Shale	3420	3470
Lime	3470	3635
Shale	3635	3650
Lime	3650	3715
Shale	3715	3770
Shale & Lime	3770	3850
Shale	3850	3900
Lime & Shale	3900	3950
Lime	3950	4215
Lime & Chert	4215	4255
Lime	4255	4385
Chert	4385	4405
Lime	4405	4420
Shale & Lime	4420	4445
Shale	4445	4495
Lime	4495	4512
	4512	Total Depth

**PLUGGING**  
 FILE SEC. 27 T. 30 R. 13W  
 300' LINE 16

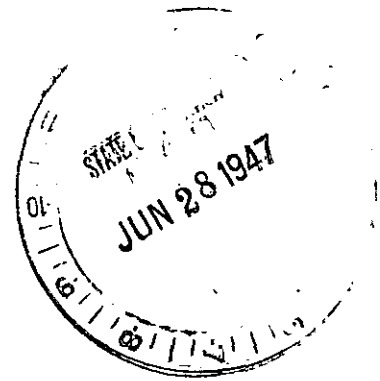

I, W. A. Grant, hereby certify that, to the best of my knowledge and belief, the above log is true and correct.

Subscribed & sworn to before me this 19th day of December, 1946

My commission expires April 7, 1947

*W. A. Grant*  
 \_\_\_\_\_  
 Notary Public