

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Barber County. Sec. 20 Twp. 30S Rge. (E) 13 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. SE Corner NE/4 NE/4
Lease Owner. Lion Oil Company
Lease Name. Lemon Well No. C-1
Office Address. P. O. Box 552, Pratt, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed. 7-12-45 19
Application for plugging filed. 9-1-45 19
Application for plugging approved. 9-1-45 19
Plugging commenced. 9-1-45 19
Plugging completed. 9-6-45 19
Reason for abandonment of well or producing formation. Dry Hole

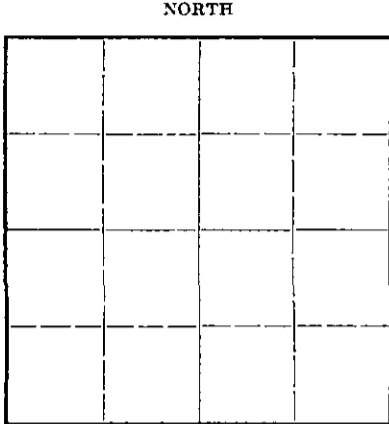

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production. None 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well. H. W. Kerr
Producing formation. None Depth to top. None Bottom. None Total Depth of Well. 4645 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				5 $\frac{1}{2}$ " OD	4645'	2829'5"
				8 5/8" OD	583'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Set bridging plug @ 3150', run 10 sacks cement. Mud to 200', set bridging plug used 15 sacks cement. Mud to 25' run 10 sacks cement

PLUGGING
FILE # 20 30-13W
BOOK PAGE 25 LINE 30



(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to Mr. Vernon Hayes
Address. P. O. Box 552
Pratt, Kansas

STATE OF KANSAS, COUNTY OF PRATT, ss.
VERNON HAYES (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Vernon Hayes*
P. O. Box 552, Pratt, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 12 day of September, 1945.

My commission expires. *Oct 18 - 45* *Ruth Warren* Notary Public.

Lion Oil Refining Company
El Dorado, Arkansas

Lemon "C" Well No. 1

SE Corner NE/4 NE/4
Sec. 20-30S-13W
Barber County, Kansas

Contractor: The R. W. Rine Drilling Company
Commenced: April 17, 1945

Completed: July 13, 1945

	LOG	
Sand & Gravel	90-160	
Shale & Shells	160-230	
Red Bed	230-725	8 5/8" casing cemented @ 583'
Shale	725-1265	
Shale & Shells	1265-1630	
Shale & Lime	1630-1900	
Lime	1900-2125	
Lime & Shale	2125-3605	
Lime	3605-3692	
Lime & Shale	3692-3922	
Lime	3922-3974	
Lime & Shale	3974-4347	
Chert	4347-4377	
Shale	4377-4445	
Lime	4445-4475	
Lime & Shale	4475-4483	
Lime	4483-4500	
Lime & Chert	4500-4575	
Coring Sand	4575-4585	
Shale	4585-4636	
Shale & Lime	4636-4645	5 1/2" casing cemented @ 4645' Total Depth 4645'

State of Kansas)
County of Barton) ss

20 30 13W
25 30

I, Clyde W. Goddard, do hereby certify that the above is a true and complete log of the ~~Barber~~ Lemon "C" Well No. 1, located in the SE corner of the NE/4 of the NE/4, Section 20, 30S, 13W, in Barber County, Kansas.

Clyde W. Goddard

Sworn to and subscribed before me this ~~19th~~ 17th day of ~~June~~ July, 1945.

Helen S. Williams
Notary Public

My commission expired December 6, 1948.