


15-007-10038-0000

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD



Locate well correctly on above Section Plat

Barber County, Sec. 30 Twp. 31 Rge. (E) 11 (W)
Location as "NE/CNW/SW" or footage from lines C NW NE
Lease Owner Aylward Drilling Company
Lease Name Nuckolls "B" Well No. 2
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed December 14 1940
Application for plugging filed May 22 1959
Application for plugging approved May 23 1959
Plugging commenced May 25 1959
Plugging completed June 1 1959
Reason for abandonment of well or producing formation Formation depleted

If a producing well is abandoned, date of last production May 19 59
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Bill Lackamp
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4360 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	108'	None
				5 1/2"	4329'	3551'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked the hole to 4360' and found it open.
Filled w/sand to 4315' and dumped 5 sacks of cement at 4315'. Pulled 5 1/2" casing, cleared hole and checked top of mud to 225'. Mudded the hole to 160', set rock bridge to 150' and dumped 30 sacks of cement. Mudded the hole to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETED

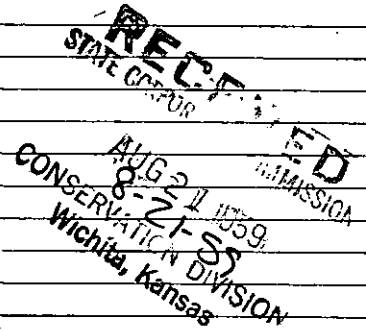

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor West Supply Co., Inc.
Address Chase, Kansas


STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Paul W. Hesse (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Paul W. Hesse
813 1st Nat'l Bank Bldg., Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of June, 1959

Duane Jessup Notary Public.

My commission expires December 11, 1961

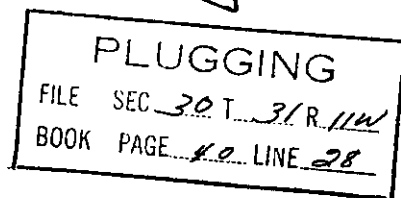

NUCKOLLS "B" NO. 2

Casing Record:

8 5/8" - 108'
5 1/2" - 4329'

Company: Olson Oil Company
Contractor: Olson Oil Company

Commenced: October 30, 1940
Completed: November 25, 1940

Location: C NW NE 30-31-11W
Barber County, Kansas

Elevation: 1581 D.F.

	<u>From</u>	<u>To</u>	<u>Remarks</u>
Sand & Red Shale	0	40	
Clay, Sand & Red Shale	40	65	
Sand	65	110	
Red Shale	110	165	
Shale & Shells	165	732	
Red Shale & Shells	732	885	
Shale & Lime	885	1150	
Salt, Shale & Shells	1150	1330	Geological Tops:
Lime	1330	1334	Lansing 3743
Shale & Lime	1334	1535	Mississippian 4326
Shale	1535	1559	
Lime	1559	1610	
Lime & Shale	1610	1822	
Lime	1822	2284	
Lime & Shale	2284	2390	
Lime	2390	2450	
Lime & Shale	2450	2533	
Shale & Shells	2533	2597	
Lime	2597	2675	
Shale	2675	2752	
Shale & Lime	2752	2801	
Lime & Shale	2801	2853	
Lime	2853	2887	
Lime & Shale	2887	2973	
Lime	2973	3230	
Lime & Shale	3230	3277	
Shale & Lime	3277	3333	
Shale	3333	3415	
Shale & Shells	3415	3447	
Lime & Shale	3447	3475	
Shale	3475	3515	
Shale & Lime	3515	3573	
Lime & Shale	3573	3665	
Sand	3665	3745	
Lime	3745	4083	
Lime & Shale	4083	4132	
Lime	4132	4204	
Shale	4204	4262	
Shale & Lime	4262	4313	
Shale	4313	4326	
Chat	4326	4360 T.D.	

RECEIVED
STATE CORPORATION COMMISSION

AUG 21 1959
8-21-59
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that this is a true and correct copy of the above log to the best of my knowledge.

Paul W. Hesse

Subscribed and sworn to before me this 11th day of August, 1959

Juane Jessup
JUANE JESSUP Notary Public

My commission expires December 11, 1961

PLUGGING
FILE SEC 30 T. 31 R. 11W
BOOK PAGE 40 LINE 81