

COMPANY: Alf. M. Landon, et al
 CONTRACTOR: Tri-State Drilling Co.
 FARM: House No. 1

LOCATION: SE SE NW
 Section 22-30-12W
 Barber Co., Kansas

COMMENCED: April 28, 1945
 COMPLETED: May 29, 1945



ELEVATION: 1789'
 PRODUCTION: D & A

CASING RECORD:
 8 5/8" cem. @ 405 Ft.
 200 sack cement

FORMATION	DEPTH	FORMATION	DEPTH
Cellar	10	shale & lime	4725
sand	115	arbuckle lime	4750
red bed & shale	285	T. D.	4767
red rock shells	490		
red bed & shale	680		
shale red rock	815		
red rock & shale	1090		
shale & shells	1150		
shale & sandy lime	1260		
shale & shells	1835		
lime & shale	2020		
brk. lime	2100		
lime & shale	2255		
lime brk.	2310		
lime & shale	2365		
lime	2385		
brk. lime	2485		
lime	2635		
lime brk.	2730		
lime & shale	2980		
lime	3285		
lime & shale	3305		
shale & lime with stks of pyrite	3330		
lime	3455		
lime brk.	3505		
lime	3660		
lime & shale	3760		
lime	3800		
shale	3810		
lime, K.C.	3840		
lime, & shale strks.	3865		
lime	4252		
lime & shale	4280		
lime	4318		
Miss. lime	4330		
lime & chert	4341		
cherty lime	4370		
shale	4380		
shale & lime stks.	4495		
shale	4534		
lime-Viola	4545		
lime(cherty)	4570		
lime	4630		
shale & sand	4637		
sand & lime	4658		
lime	4676		
shale	4693		

GEOLOGICAL FORMATION TCPS

Ft. Riley	2030
Florence Flint	2190-2220
Topeka	3030
K.C.	3810
Massey	4281
Miss.	4318
Viola	4519
Simpson	4604
Arbuckle	4723
T.D.	4767

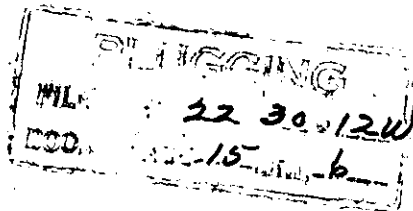

I hereby certify this to be a correct and accurate log of the above described well as shown by the drilling reports.

[Signature]

Subscribed and sworn to before me this 31 day of May, 1945

[Signature]
 Notary Public

My commission expires December 6, 1945