


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

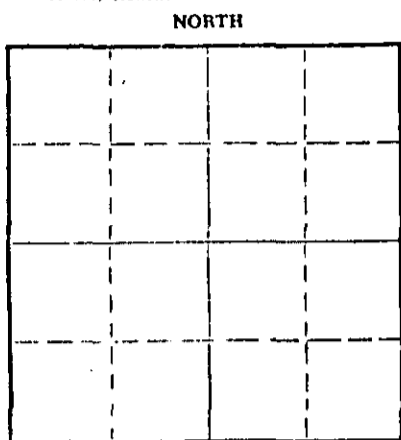

Locate well correctly on above
Section Plat

Barber County, Sec. 30 Twp. 31 Rge. 11 (E) (W) x
Location as "NE/CNW&SWX" or footage from lines C of S/2 S/2 NE
Lease Owner Solar Oil Co.
Lease Name Nuckolls Well No. #4
Office Address Box 903, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19____
Application for plugging filed 19____
Application for plugging approved 19____
Plugging commenced 5-3-67 19____
Plugging completed 5-6-67 19____
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Archie Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4330' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	4323'	3071.22'
				8 5/8"	150'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 3550', mixed and ran 5 sacks cement thru dump bailer.

Circulated hole at 1300' with 80 bbls. rotary mud. Pulled 37 joints. Squeezed hole with 15 sacks gel and 100 sacks ceemnt with 2% gel.

RECEIVED
STATE CORPORATION COMMISSION

MAY 9 1967
5-9-67

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Southwest Casing Pulling Co., Inc.
Address Box 364, Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton ss.
Southwest Casing Pulling Co., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.
Box 364, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 8 day of May, 19 67

My commission expires 24 October 1968

Sidney D. Miller
Notary Public.

15-057-10050-0000

NUCKOLLS NO. 4

Center of the S/2 of the S/2 of the NE/4 Section 30-31S-11W Barber County, Kansas

Rigging up Rotary Tools 6/ 2/52
Tearing down Rotary Tools 6/20/52

Ran 5 Jts. 8-5/8" used 8 round thread casing. Set at 155' and cemented with 135 sacks.
Ran 131 Jts. 5-1/2" 8 round thread casing, Set at 4,323.50' and cemented with 200 sacks of sack cement.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	
Surface Soil	0 feet	40 feet	
Clay and surface rock	40	120	
Red Gravel and Sand and Redbed	120	155	
Redbed and Sand	155	560	
Shale and Shells	560	1300	
Shale and Lime	1300	1875	
Shale	1875	1920	
Shale and Lime	1920	2080	
Shale and Lime Streaks	2080	2210	
Shale and Lime	2210	2629	
Lime	2629	2775	
Shale and Lime	2775	2970	
Sand	2970	2985	
Lime	2985	3165	
Shale and Lime	3165	3280	
Lime	3280	3360	
Lime and Shale	3360	3390	
Sand and Lime	3390	3585	
Lime (hard) and Sand	3585	3601	
Sand	3601	3610	
Sand and Shale	3610	3695	
Sand, Shale, and Lime	3695	3718	
Lime and Sand	3718	3780	
Lime	3780	3810	
Lime, Shale, and Sand Streaks	3810	3838	
Lime (hard)	3838	3945	
Lime and Shale	3945	4000	
Lime	4000	4040	
Lime and Shale Streaks	4040	4074	
Lime	4074	4119	
Lime and Shale	4119	4300	
Lime	4300	4315	
Shale, Lime, and Chat	4315	4340	TOTAL DEPTH
Baker Plug at 3800'			

RECEIVED
GEOLOGICAL COMMISSION
MAY 3 1967
S-367
CONSERVATION DIVISION
Wichita, Kansas

I, Martha Bobbitt, hereby certify that the above log is true and correct to the best of my belief and knowledge.

Martha Bobbitt

Subscribed and sworn to before me this 24th day of June, 1952.

Warren H. Popke
Notary Public

My commission expires: September 24, 1955.