


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-3

Take All Information Completely
State Required Attached
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

WELL PLUGGING RECORD

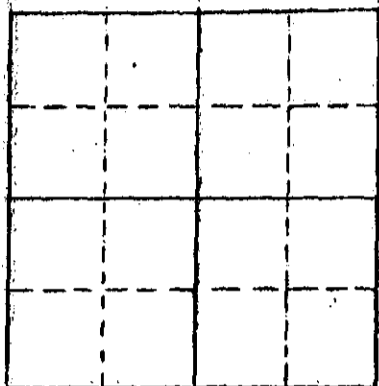

Locate well correctly on above
Section Plat

Barber County, Sec. 29 Twp. 31S Rge. ~~XXX~~ 11 (W)
Location as "NE/CNWSW" or footage from lines C SW/4
Lease Owner Graves Drilling Co., Inc.
Lease Name Whelan Well No. 1
Office Address 910 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed May 19 1976
Application for plugging filed May 19 1976
Application for plugging approved May 19 1976
Plugging commenced May 19 1976
Plugging completed May 19 1976
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 10
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein, Attica, Kansas
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	216'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 200 feet. Pumped 35 sacks of cement through drill pipe with pump truck. Pushed plug and 1/2 sack balls to 40' and pumped 15 sacks of cement through drill pipe with pump truck to base of well cellar. Plugged rat hole with 2 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION

MAY 25 1976
5-25-76
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor (If additional description is necessary, use BACK of this sheet) Graves Drilling Co., Inc.
Address 910 Union Center, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK ss.
John C. Graves (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves
910 Union Center, Wichita, Kansas 67202 (Address)

Subscribed and sworn to before me this 24th day of May 1976

My commission expires May 9, 1979 Betty Brandt Notary Public.

ROTARY DRILLERS' LOG

OPERATOR: Graves Drilling Co., Inc. DRILLING COMMENCED: 10 May 1976
 910 Union Center
 Wichita, Kansas 67202

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: 18 May 1976
 910 Union Center
 Wichita, Kansas 67202

CASING RECORD: 5 Jts. 216' of used 8-5/8" LOCATION: Whelan No. 1
 cemented with 175 sacks C SW/4
 Section 29-31S-11W
 Barber County, Kansas

0 - 586 Red bed
 586 - 1675 Shale & shells
 1675 - 1875 Shale
 1875 - 2544 Shale & shells
 2544 - 3725 Shale
 3725 - 3900 Shale with lime
 3900 - 4183 Shale & lime
 4183 - 4328 Lime & shale
 4328 - 4390 Lime
 4390 Rotary Total Depth

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

RECEIVED
STATE CORPORATION COMMISSION

GRAVES DRILLING CO., INC.

MAY 25 1976
5-25-76
CONSERVATION DIVISION
Wichita, Kansas

By J. Graves
President

STATE OF KANSAS)
)
SEDGWICK COUNTY) SS:

Subscribed and sworn to before me, a Notary Public, this 24th day of May, 1976

My commission expires: 2 February 1980

Courtney M. Graves
Courtney Notary Public
M. Graves

