

Must be approved by the K.C.C. five (5) days prior to commencing well

Expected Spud Date April 14, 1990
month day year

..... C SE NE Sec 17 Twp 30 S, Rg 13 X East West

OPERATOR: License # 5056
Name: F. G. HOLL COMPANY
Address: P. O. BOX 780167
City/State/Zip: Wichita, Kansas 67278-0167
Contact Person: Elwyn H. Nagel
Phone: (316) 684-8481

..... 3300 feet from South line of Section
..... 660 feet from East line of Section
(Note: Locate well on Section Plat Below)

CONTRACTOR: License #: 5841
Name: TRANS-PAC DRILLING, INC.

County: Barber
Lease Name: Lambert "B" Well #: 2-17
Field Name: Lemon

Well Drilled For: Well Class: Type Equipment:
..X Oil ... Inj ... Infield ..X Mud Rotary
... Gas ... Storage ..X Pool Ext. ... Air Rotary
... OAWO ... Disposal ... Wildcat ... Cable
... Seismic; ... # of Holes

(*) Is this a Prorated Field? ... yes X no ✓
Target Formation(s): ..Viola.....
Nearest lease or unit boundary: 660'
Ground Surface Elevation: 1835 feet MSL
Domestic well within 330 feet: yes X .. no
Municipal well within one mile: yes X .. no
Depth to bottom of fresh water: ... 100
Depth to bottom of usable water: ... 180
Surface Pipe by Alternate: ..X 1 ... 2
Length of Surface Pipe Planned to be set: ..225'
Length of Conductor pipe required: ... NONE
Projected Total Depth: 4790
Formation at Total Depth: ..Arbuckle.....
Water Source for Drilling Operations:
..... X well farm pond other
DWR Permit #: Trans-Pac will apply
Will Cores Be Taken?: yes X .. no
If yes, proposed zone:

If OAWO: old well information as follows:
Operator:
Well Name:
Comp. Date: Old Total Depth

Directional, Deviated or Horizontal wellbore? yes X. no
If yes, total depth location:

AS of this date not approved **AFFIDAVIT**


The undersigned hereby affirms that the drilling, completion and eventual plugging of this well will comply with K.S.A. 55-101, et. seq.

It is agreed that the following minimum requirements will be met:

1. The appropriate district office shall be notified before setting surface pipe;
2. The minimum amount of surface pipe as specified above shall be set by circulating cement to the top; in all cases surface pipe shall be set through all unconsolidated materials plus a minimum of 20 feet into the underlying formation;
3. If the well is dry, a plugging proposal shall be submitted to the district office. An agreement between the operator and the district office on plug length and placement is necessary prior to plugging;
4. The appropriate district office will be notified before well is either plugged or production casing is cemented in;
5. If an Alternate II completion, production pipe shall be cemented from below any usable water to surface within 120 days of spud date. In all cases, notify district office prior to any cementing.

I hereby certify that the statements made herein are true and to the best of my knowledge and belief.

Date: ... 3/12/90 Signature of Operator or Agent: [Signature] Title... Geologist

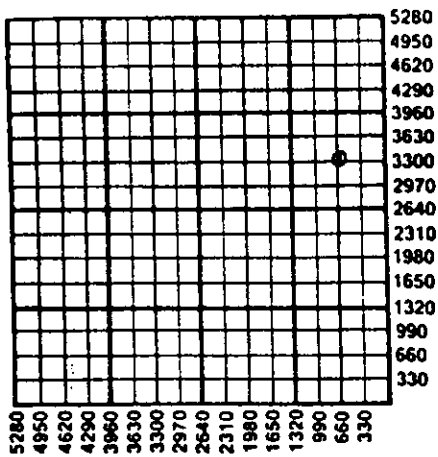

CONSERVATION DIVISION
Wichita, Kansas
MAR 12 1990

STATE CORPORATION COMMISSION
RECEIVED

FOR KCC USE:
API # 15- 007-22,298-00-00
Conductor pipe required NONE feet
Minimum surface pipe required 200' feet per Alt. 1
Approved by: [Signature] 3/16/90
EFFECTIVE DATE: 3/21/90
This authorization expires: 9/16/90
(This authorization void if drilling not started within 6 months of effective date.)
Spud date: _____ Agent: _____

17
30
13

- REMEMBER TO:
- File Drill Pit Application (form CDP-1) with Intent to Drill;
 - File Completion Form ACO-1 within 120 days of spud date;
 - File acreage attribution plat according to field proration orders;
 - Notify appropriate district office 48 hours prior to workover or re-entry;
 - Submit plugging report (CP-4) after plugging is completed;
 - Obtain written approval before disposing or injecting salt water.

Joan Finney
Governor

Jim Robinson
Chairman

Keith R. Henley
Commissioner

Rachel C. Lipman
Commissioner

Judith McConnell
Executive Director

Brian J. Moline
General Counsel



Kansas Corporation Commission

July 11, 1991

HOLL, F.G., COMPANY
6427 EAST KELLOGG

WICHITA, KS 67207

Re: Outstanding Information
API# 15-007-22,298-00-00
WELL NAME LAMBERT B #2-17
STR 17-30-13W
COUNTY BA

Dear Sirs:

A review of the Kansas Corporation Commission records shows that the Intent to Drill on the well listed above has expired. We have not received a spud call nor an ACO-1.

If the well has not been drilled, please check, sign and date below and return this letter to the Wichita Office.

Well not drilled. Signature Edward H. Vogel
Date July 15, 1991

If the well has been drilled, please submit the ACO-1 Completion Report and all attachments on this well along with a copy of this letter to the Wichita Office.

In either case we will require an answer to this letter no later than 15 days from the date of this letter. Failure to submit the requested information will subject the operator to the assessment of a \$500 administrative penalty under K.A.R. 82-3-107 of the General Rules and Regulations of the State of Kansas.

Should you have any questions concerning this matter please contact the undersigned at (316) 263-3238.

Sincerely,
David P. Williams

David P. Williams

RECEIVED
STATE CORPORATION COMMISSION

cc: District Office
File

JUL 17 1991

CONSERVATION DIVISION
Wichita, Kansas

Conservation Division
William R. Bryson
Director
200 Colorado Derby Bldg.
202 W. 1st Street
Wichita, Kansas 67202-1286
Telephone (316) 263-3238