


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

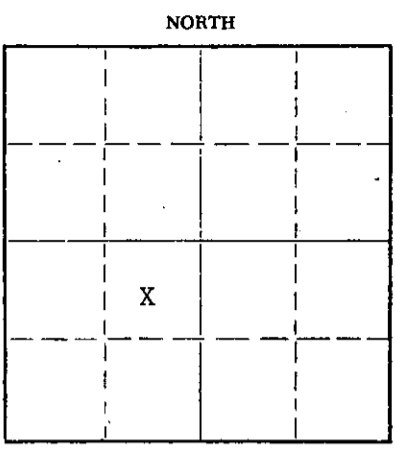

Locate well correctly on above
Section Plat

Barber County. Sec. 4 Twp. 35S Rge. 13 (W)
Location as "NE/CNW&SW&" or footage from lines C-NE-SW
Lease Owner C.R.A. and D. G. Hamilton
Lease Name Pierson Well No. 1
Office Address Central Building - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 21 19 61
Application for plugging filed December 21 19 61
Application for plugging approved December 21 19 61
Plugging commenced December 21 19 61
Plugging completed December 21 19 61
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hampel
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	250	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud from 3050' - 240'
Halliburton plug at 240'
20 sacks of cement and 1/4 sack of hulls on bottom plug.
Mud to 40'
10 sacks of cement and 1/4 sack of hulls on top plug.
2 sacks of cement in rat hole.
Steel plate welded on top of surface

RECEIVED
STATE CORPORATION COMMISSION

DEC 17 1962

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor _____
Address _____

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Robert L. Jones (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Box 638 - Arkansas City, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this _____ day of _____, 19____

My commission expires _____ Notary Public.




DRILLER' LOG

OPERATOR: CRA and D. G. Hamilton
CONTRACTOR: FORTUNE OIL & GAS, INC.
WELL: PIERSON # 1
LOCATION: C-NE-SW-Sec.4, T-35-S, R-13
Barber County
COMMENCED : December 4, 1961
COMPLETED: December 21, 1961

0	1242	Shale and Red Beds
1242	1570	Shale and Shells
1570	1690	Lime and Shale
1690	1745	Shale and Red Beds
1745	2055	Limestone
2055	2420	Lime and Shale
2420	2529	Lime
2529	3820	Lime and Shale
3820	3850	Sand
3850	T. D.	Total Depth - D & A

I, Robert L. Jones, do hereby certify that the above and foregoing is a true and correct copy of the log of the Pierson #1, located in the NE/4 of the SW /4, of Section 4, T-35-S, R-13-, Barber County, Kansas, as reflected by the files of Fortune Oil and Gas, Inc.


Robert L. Jones

STATE OF KANSAS)
) SS:
COUNTY OF SEDGWICK)

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas, this 10th day of January, 1962.


NOTARY PUBLIC

My Commission Expires:

7-27-63

RECEIVED
STATE CORPORATION COMMISSION
DEC 17 1962
CONSERVATION DIVISION
Wichita, Kansas