


15-077-01061-00-00

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

S/2 NE/4 of SE/4

HARPER County, Sec. 13 Twp. 31 Rge. 9 (W)

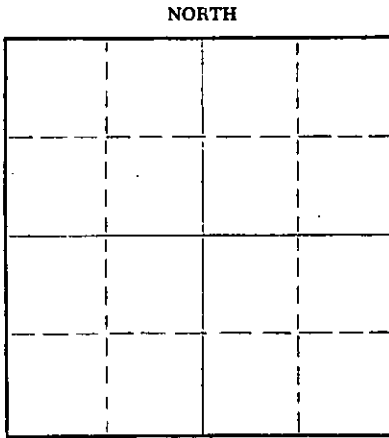

Locate well correctly on above Section Plat

Location as "NE/CNW/SE/SW" or footage from lines _____
Lease Owner Wichita Iron & Metals Corp., Inc.
Lease Name GOULD Well No. 1
Office Address Box 2421, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced February 25, 19 61
Plugging completed " 27, 19 61
Reason for abandonment of well or producing formation reservoir depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Fred Hemple
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4449 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	224'	none
				5-1/2"	4449'	3456'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded hole back to 4360'
Ran 4 sacks cement
pulling pipe and mudding hole to 220'
Rock bridge from 220' to 210' & ran 20 sacks cement
Mudded to 35' and ran 10 sacks of cement to base
of cellar.

RECEIVED
STATE CORPORATION COMMISSION

5-16-61 MAR 16 1961

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Glenn & Smith
Address Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Wichita Iron & Metals Corp., Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ray Stokoyl
By: Ray Stokoyl
Box 2421, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 13th day of March, 19 61

My commission expires December 22, 1962
Evelyn V. North
Evelyn V. North Notary Public.


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company: AURORA GASOLINE, ET AL
Farm: Gould No. 1

SEC. 14 T. 31 R. 9W
SE NE SE

Total Depth. 4449'
Comm. 4-25-55 Comp. 5-1-55
Shot or Treated.
Contractor: Berwick Drlg.
Issued. 7-1-61

County Harper
KANSAS



CASING:
8" 224'
5" 4448'

Elevation. 1628' RB

Production. Dry

Figures Indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE:

TOPS: SCOUT
Anhydrite 1139
Heebner 3442
Toronto 3456
Base Oread 3469
Lansing 3635
Base Kansas City 4169
Cherokee 4303
Mississippi 4374
Total Depth 4449

RECEIVED
STATE CORPORATION COMMISSION

NOV 1 1962

CONSERVATION DIVISION
Wichita, Kansas