


15-007-01681-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

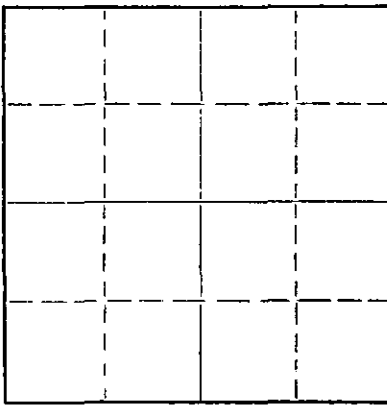

Locate well correctly on above  
Section Plat

Barber County. Sec. 27 Twp. 34S Rge. 12W (E) (W)  
Location as "NE/CNW/SW" or footage from lines C SW NW  
Lease Owner Bachus Oil Company  
Lease Name Richardson Well No. 1  
Office Address 115-16 Union Center, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed December 18 19 56  
Application for plugging filed December 18 19 56  
Application for plugging approved December 18 19 56  
Plugging commenced December 18 19 56  
Plugging completed December 18 19 56  
Reason for abandonment of well or producing formation no oil or gas in paying quantities available.  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4840 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	321.14'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with extra heavy rotary mud from Total Depth to 310'. Bridge plug, and 1/2 sack Hulls, 20 sacks, cement to 255'. Filled hole with extra heavy rotary mud to 43', bridge plug and 1/2 sack Hulls, 10 sacks cement to 3'. Welded steel cap on surface pipe.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Capitt Drilling, Inc.  
Address 814-16 Union Center, Wichita, Kansas

STATE OF KANSAS, COUNTY OF Sedgwick, ss.  
R. R. McNicol (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R.R. McNicol  
814-16 Union Center, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 19th day of December, 19 56

My commission expires September 30, 1959

Dorlene May  
**RECEIVED** Notary Public.  
STATE CORPORATION COMMISSION

**PLUGGING**  
FILE SEC 27 T 34 R 12W  
BOOK PAGE 127 LINE 14

DEC 21 1956  
12-21-56  
CONSERVATION DIVISION  
Wichita, Kansas

ROTARY DRILLING LOG

OPERATOR: Bachus Oil Company  
 Richardson No. 1  
 C SW NW Sec. 27-34-12W,  
 Barber County, Kansas

CONTRACTOR: Capitt Drilling, Inc.  
 COMM: 12/4/56  
 COMP: 12/18/56

Remarks: Set 321.14' of 8-5/8" surface casing cemented with 300 sacks common cement, 2% C.C.

Formations:

Shale	40'
Shale & Shells	319'
Shale & Red Rock	890'
Shale & Shells	1495'
Lime	1530'
Shale & Shells	1700'
Lime & Shale	2052'
Lime	2164'
Lime & Shale	3530'
Shale & Shells	3625'
Sand, Sandy Shale & Shells	3707'
Shale & Lime	3990'
Shale & Shells	4120'
Lime & Shale	4412'
Lime	4696'
Lime & Sand	4725'
Lime	4840'
Rotary Total Depth (D&A)	4840'

We certify the above log is true and correct to the best of our knowledge and belief.

CAPITT DRILLING, INC.

*R.R. McNicol*

R. R. McNicol

STATE COMMISSION

DEC 21 1956  
 12-21-56  
 CONSERVATION DIVISION  
 Wichita, Kansas

PLUGGING  
 FILE SEC 27 T 34 R 12W  
 BOOK PAGE 127 LINE 14