

15-007-00611-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barber County, Sec. 22 Twp. 34S Rge. 12 E6 (W)
Location as "NE/CNW/SWK" or footage from lines. ~~S~~ ~~N~~ ~~E~~ ~~N~~ ~~E~~
Lease Owner Murfin Drilling Company
Lease Name Cook Well No. 1
Office Address 617 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed July 16 1958
Application for plugging filed July 16 1958
Application for plugging approved July 16 1958
Plugging commenced July 16 1958
Plugging completed July 16 1958
Reason for abandonment of well or producing formation Dry

NORTH

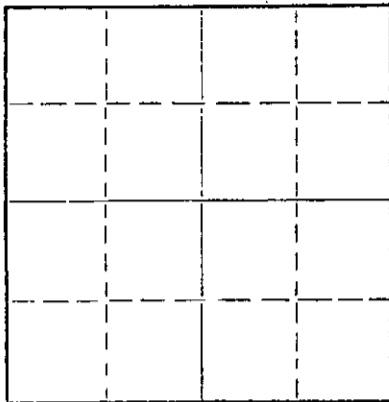

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well W. L. Lackamp
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	310	None
				5-1/2"	4760=	3618'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Top perforation from 4662 to 4672 feet.
Filled with sand to 4660 feet and dumped
5 sx cement with dump bailer. Shot pipe
off at 3600 feet. Pipe was sticking at
about 700 feet and did not stop to circulate
at 1700 feet. Pumped 25 sacks of jell mud
down hole and 60 sx cement from 180 feet to
top of surface casing with Globe Cementing
Company truck.

RECEIVED
STATE CORPORATION COMMISSION
JUL 31 1962
7-31-62
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Forbes Pipe Pulling Company
Address Great Bend, Kansas

STATE OF Kansas COUNTY OF Sedgewick, ss.
W. R. Murfin - District (owner of well) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. R. Murfin
617 Union Center Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of July, 1962
W. R. Murfin
Notary Public.

My commission expires June 14, 1964



15-007-00611-0000
WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


COPIES

Company- REX & MORRIS DRLG. & OSAGE OIL & GAS
Farm- Cook No. 1

SEC. 22 T. 34 R. 12W
C NW NW

Total Depth. 4760'
Comm. 7-1-58 Comp. 7-18-58
Shot or Treated.
Contractor. Rex & Morris Drlg.
Issued. 7-8-61

County Barber
KANSAS



CASING:
8" 310'
5" 4760'

Elevation. 1430' RB

Production. Dry

Figures Indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE:

TOPS: SCOUT
Elgin Sand 3575
Heebner 3759
Toronto 3790
Douglas Shale 3821
Lansing 3963
Mississippi 4658

Total Depth 4760

RECEIVED
STATE CORPORATION COMMISSION
JUL 30 1962
7-30-62
CONSERVATION DIVISION
Wichita, Kansas