


15-007-20080-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

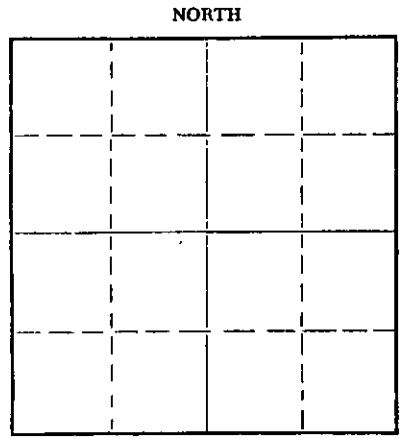

Locate well correctly on above
Section Plat

Barber County. Sec. 23 Twp. 34S Rge. 14 (E) (W)
Location as "NE/CNW/SW" or footage from lines C. E./2 SW/4
Lease Owner Bowers Drilling Company, Inc.
Lease Name McBrayer Well No. 2
Office Address 1434 Wichita Plaza
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed November 28 19 68
Application for plugging filed December 30 19 68
Application for plugging approved December 27 19 68
Plugging commenced December 27 19 68
Plugging completed December 30 19 68
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes, verbally

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 4875 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	310'	
				4-1/2"	4869'	4600'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged back w/sand from 4875 to 4750. Mixed and dumped 4 sacks cement from 4750 to 4700. Cleaned out cellar, set in jacks, pulled 36" tension at 50,000# pressure. Made shots at 4659 and 4592. Pulled casing. Pulled rest of casing, 142 joints total. Loaded jacks. Mudded hole to 210, set 10' rock bridge from 210 to 200. Mixed and dumped 25 sacks of cement from 200 to 125. Mudded hole from 125 to 40. Set 10' rock bridge from 40 to 30. Mixed and dumped 10 sacks cement from 30 to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
1-18-69
JAN 10 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Russ Casing Pulling, Inc.
Address Box 1082, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Emil E. Bowers (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Emil E. Bowers
1434 Wichita Plaza, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of January 19 69

My commission expires June 30, 1971
Sherry Gish Notary Public.

WELL LOG

COMPANY: Bowers Drilling Company, Inc.
CONTRACTOR: Bowers Drilling Company, Inc.
FARM: McBrayer #2
LOCATION: C E/2 SW/4 Section 23-34S-14W
 Barber County, Kansas
COMMENCED: November 18, 1968
COMPLETED: November 28, 1968
ELEVATION: 1624 Kelly Bushing

0 - 313	Redbed	Set 8-5/8" csg at 310 w/225 sacks
313 - 880	Shale	
880 - 1106	Redbed and shale	
1106 - 1860	Shale	
1860 - 3775	Lime and shale	
3775 - 3732	Shale	
3732 - 4336	Lime and shale	
4336 - 4805	Lime	
4805 - 4875	Lime and chert	
4875	T. D.	4 1/2" casing set at 4869 w/150 sacks

LOG TOPS:

Elgin Zone	3769 (-2145)
Heebner	3971 (-2347)
Toronto	3991 (-2367)
Douglas	4019 (-2395)
Lansing	4155 (-2531)
Base/Kansas City	4660 (-3036)
Mississippian	4756 (-3132)


RECEIVED
 STATE GOVERNMENT DEPARTMENT
 JAN 5 1969
 CONSERVATION DIVISION
 WASHINGTON DC

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

I, Emil E. Bowers, do hereby certify that the above and foregoing is a true and correct copy of the log of the McBrayer #2 located C E/2 SW/4 Section 23-34S-14W, Barber County, Kansas, as reflected by the files of Bowers Drilling Company, Inc.


 Emil E. Bowers

Subscribed and sworn to before me, a Notary Public, in and for the State of Kansas, this 5th day of December, 1968.

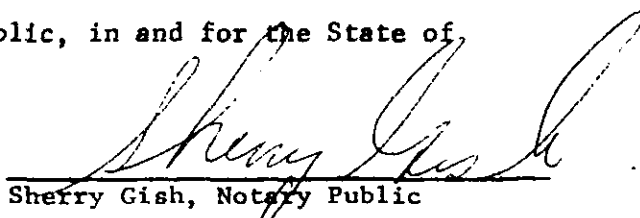
 Sherry Gish, Notary Public

My commission expires June 30, 1971.