

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Barber County, Sec. 16 Twp. 34S Rge. 14 N/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
Center S/2 SW/4 SW/4


Lease Owner E. H. Wood, Jr.
Lease Name McBrayer Well No. 1-B
Office Address 301 Farmers & Bankers Bldg., Wichita, KS
Character of Well (Completed as Oil, Gas or Dry Hole) dry hole

Date Well completed 2/6 1982
Application for plugging filed 2/6 1982
Application for plugging approved 2/6 1982
Plugging commenced 2/6 1982
Plugging completed 2/6 1982

Reason for abandonment of well or producing formation
No commercial quantity of oil or gas encountered.
If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Maurice Leslie
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____
Show depth and thickness of all water, oil and gas formations.

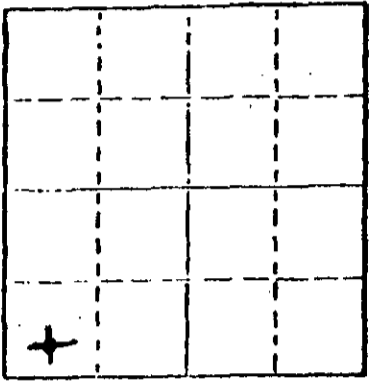

Locate well correctly on above
Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Total Depth 4751 feet. Set first plug at 843 feet with 60 sacks cement, second plug at 375 feet with 30 sacks, 10 sacks and a bridge at 40 feet and 10 sacks in the rat hole. Job complete at 3:00 p.m. on February 6, 1982.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Kaw Drilling Co., Inc.

STATE OF KANSAS COUNTY OF SEDGWICK, ss. contractor
K.S. Martin, President of Kaw Drilling Co., Inc. (~~employee of owner or former operator~~)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
K. S. Martin, President 1010 Union Center
(Address) Wichita, KS 67202


SUBSCRIBED AND SWORN TO before me this 9th day of February, 1982.

[Signature]
Mary Susan Whaley Notary Public.

My commission expires December 10, 1983

STATE CORPORATION COMMISSION

FEB 10 1982
2-10-82
CONSERVATION DIVISION
Wichita Kansas



OPERATOR: E. H. Wood, Jr.
 CONTRACTOR: Kaw Drilling Co., Inc.
 WELL NAME: McBrayer 1-B
 LOCATION: C S/2 SW/4 SW/4 Sec. 16-34S-14W
 Barber County, Kansas
 SPUD DATE: January 27, 1982
 COMPLETION DATE: February 6, 1982

0	1307	Shale
1307	1812	Shale and Lime
1812	2205	Shale and Shell
2205	2415	Shale and Lime
2415	2755	Shale
2755	4751	Shale and Lime
	4751	R.T.D.

Water Well Service Company set 100 feet of 14 inch surface casing with 100 sacks of common cement, 2% gel and 3% calcium chloride on January 27, 1982. Drilled 850 feet of 12½ inch hole. Ran 20 joints of 23 pound, 8 5/8 inch new casing. (Tallied at 828.56 feet.) Set at 843 feet with 450 sacks cement as follows: Baskets on sixth and eighth joints and centralizers on seventh and ninth joints. Pumped 325 sacks cement, tripped baskets. Rigged up 1 inch line and pumped 125 sacks cement round top of casing. Cement did not circulate.

Total depth 4751 feet. Set first plug at 843 feet with 60 sacks common cement, second plug at 375 feet with 30 sacks, 10 sacks and a bridge at 40 feet and 10 sacks in the rat hole. Job complete at 3:00 p.m. on February 6, 1982. State Plugger - Mr. Leslie.

STATE OF KANSAS)
) ss
 COUNTY OF SEDGWICK)

RECEIVED
 STATE CORPORATIONS COMMISSION
 FEB 10 1982
 2-10-82
 CONSERVATION DIVISION
 Wichita, Kansas

I, K. S. Martin, President of Kaw Drilling Co., Inc., being first duly sworn and upon my oath, state that: I have knowledge of the facts, statements and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

K. S. Martin
 K. S. Martin, President

SUBSCRIBED AND SWORN to before me on this 9th day of February, 1982.

Mary Susan Whaley
 Mary Susan Whaley, Notary Public

My Commission Expires:
 December 10, 1983

