


15-007-30164-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Barber County. Sec. 12 Twp. 34S Rge. (E)14 (W)
Location as "NE/CNW/SW" or footage from lines SE NE NW
Lease Owner Skelly Oil Company
Lease Name R. G. Anderson Well No. 1
Office Address P. O. Box 649, McCook, Nebraska
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 3-25-65
Application for plugging filed March 25, 19 65
Application for plugging approved March 29, 19 65
Plugging commenced 3-25-65 19
Plugging completed 3-25-65 19
Reason for abandonment of well or producing formation dry

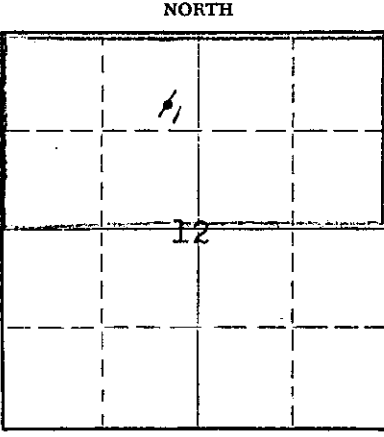

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (verbally)

Name of Conservation Agent who supervised plugging of this well Mr. A. Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4859 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	378'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

fill hole with heavy mud to 275', bridge with 1 sx. cement, 3/4 sx. hulls & 8-5/8" plug. Brige held drill pipe. Mix 20 sx. cement fill hole with heavy mud up to 40', build solid bridge & cement up to base of cellar w/10 sx. cement, 1 sx. cement in rathole. Plugged @ 5:15 p.m. 3-25-65.

RECEIVED
STATE CORPORATION COMMISSION

APR 2 1965
4-2-65

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor K & E DRILLING, INC.
Address 719 Union Center, Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
H. L. Wilson of K & E DRILLING, INC. (employee of ~~K & E DRILLING, INC.~~)
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. L. Wilson
719 Union Center, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of March 19 65

My commission expires 8-30-65
Julene M. Bannan
Notary Public.



DRILLER'S WELL LOG

OPERATOR: SKELLY OIL COMPANY
P. O. Box 649
McCook, Nebraska

WELL NAME: #. R. G. Anderson
LOCATION: SE NE NW, 12-34S-14W
Barber County, Kansas

CONTRACTOR: **K & E DRILLING, INC.**
719 UNION CENTER BLDG.
WICHITA, KANSAS

COMMENCED: March 11, 1965

CASING RECORD: 8-5/8" @ 378' w/225 sx.

COMPLETED: March 25, 1965

ELEVATION:

ROTARY TOTAL DEPTH: 4859'

PRODUCTION: D & A

FORMATION RECORD

Depths shown indicate bottom of formations encountered.

Red Bed & Shale	135
Sand	160
Shale & Shells	378
Shale	880
Shale & Shells	1970
Lime & Shale	2105
Lime	2920
Shale	3036
Shale	3290
Lime & Shale	3415
Lime	4859

RECEIVED
STATE CORPORATION COMMISSION

APR 2 1965

4-2-65
CONSERVATION DIVISION
Wichita, Kansas

CERTIFICATION

State of KANSAS }
County of SEDGWICK } ss:

I, H. L. Wilson, of K&E DRILLING, INC., upon oath state that the above and foregoing is a true and correct copy of the Driller's Log of the above named well.

Subscribed and sworn to before me this 30th day of March, 19 65

My Commission expires: 8-30-65 Julene M. Bannon

Notary Public.

