

15-007-00197-00-01


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

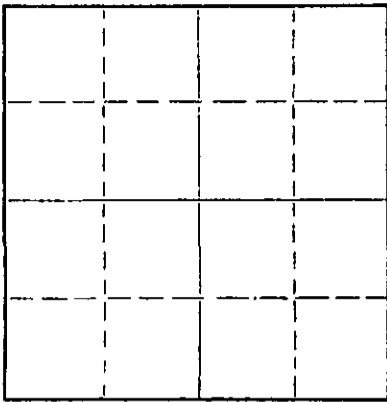

Locate well correctly on above
Section Plat

Barber County, Sec. 9 Twp. 31S Rge. 11 (E) (W)X
Location as "NE/CNW%SW%" or footage from lines NE NE SE
Lease Owner Mobil Oil Company
Lease Name Page Zundle Well No. 1
Office Address P. O. Box 335 Attica, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed
Application for plugging filed
Application for plugging approved
Plugging commenced 12-30-63
Plugging completed 1-4-64
Reason for abandonment of well or producing formation Dry
If a producing well is abandoned, date of last production
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

RECEIVED
STATE CORPORATION COMMISSION
JAN 8 1964
1-8-64
CONSERVATION DIVISION
Wichita, Kansas

Name of Conservation Agent who supervised plugging of this well Archie V. Elving
Producing formation Depth to top Bottom Total Depth of Well 4927 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				10 3/4	355	None
				5 1/2	None	3550

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Moved in. Blowing gas. Pump water - killed gas. Sanded to 4680'. Dumped 5 sacks of cement. Cleaned out cellar. Working pipe.
Working pipe. Shot well at 3800' - 3715'. Working pipe. Measured to 2500'. Pulling pipe.
Working pipe. Shot well at 3200' - 3100'. Circulating. Spotted 75 bbl. of oil.
Working pipe.
Pulling pipe.
Pulling pipe.
Plugging well with mud rock bridge at 300'. Dumped 30 sacks of cement. Filled hole to 40' and rock bridge. Capped well with 15 sacks of cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
P. O. Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7 day of January, 1964

My commission expires May 27, 1964

Notary Public.

15-057-00197-00-01

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY
505 East Murdock, Wichita, Kansas


COPY

Company- PERKINS BROS.
Farm- Page - ~~zundie~~ No. 1

SEC. 9 T. 34 R. 14W
NE NE SE

Total Depth. 4927'
Comm. 5-9-56 Comp. 6-29-56
Shot or Treated.
Contractor.
Issued. 11-19-60

County Barber
KANSAS



CASING:
10" 350'
5" 4927'

Elevation. 1613' RB

Production. 750,000 CFG

Figures indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE.

TOPS: SCOUT
Lansing 4080
Mississippi 4700

RECEIVED
STATE CORPORATION COMMISSION
JUL 16 1964
7-16-64
CONSERVATION DIVISION
Wichita, Kansas