


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

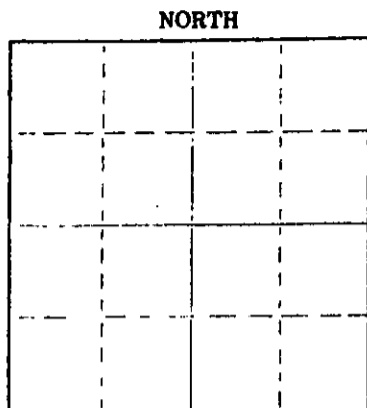

Locate well correctly on above Section Plot

Barber County, Sec. 33 Twp. 34S Rge. 15W (E) (W)
Location as "NE/CNW/SW" or footage from lines G-E 1/2 of SW 1/4
Lease Owner Coin Petroleum
Lease Name Z Bar Cattle Co. Well No. 1
Office Address 780 Farm Credit Bank Bldg., Wichita, Kan. 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed 5-5-1976
Application for plugging filed 8-10-1976
Application for plugging approved 8-13-1976
Plugging commenced 8-26-1976
Plugging completed 8-30-1976
Reason for abandonment of well or producing formation Dry

If a producing well is abandoned, date of last production 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstien
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5082
Show depth and thickness of all water, oil and gas formations

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				13 3/8"	97'	None
				8 5/8"	1042'	None
				4 1/2"	5081'	4170'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dumped sand - from 5081' to 5030'
4 sacks cement - from 5030' to 4990'
Ripped pipe at 4170'
Wooden bridge at 250'
Rock from 250' to 240'
4 yards ready mix from 240' to surface

RECEIVED
STATE CORPORATION COMMISSION

OCT 13 1976

CONSERVATION DIVISION
WICHITA, KANSAS

Name of Plugging Contractor Clarke Corporation
Address Box 187, Medicine Lodge, Kansas 67104
(If additional description is necessary, use BACK of this sheet)

STATE OF KANSAS COUNTY OF Sedgwick ss.
Robert A. CLARK (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) Robert A. Clark
780 Farm Credit Bank Bldg. Wichita, Ks.
(Address)

Subscribed and sworn to before me this 12th day of October, 1976

My commission expires LILLIAN R. SPICHER
STATE NOTARY PUBLIC
Sedgwick County, Ks.
My Comm. Exp. June 18, 1979

Lillian R. Spicher
Notary Public.

GABBERT-JONES, INC.
 WICHITA, KANSAS
 DRILLERS' WELL LOG

RECEIVED
 STATE CORPORATION COMMISSION

AUG 12 1976

CONSERVATION DIVISION
 Wichita, Kansas

Z Bar Cattle Co.
 200' W C E/2 Sw/4 Sec 33-34S-15W
 Barber County Kansas

Commenced: 4-1-76

Completed: 4-14-76

OPERATOR: COIN PETROLEUM CO.

Depth From	to	Formation	Remarks
0	60	Red Rock	Ran 3 jts of 13 3/8" csg set
60	287	Redbed	Ø 97' Cemented w/150 sks
287	900	Redbed-Shale	HA5-3% CC PD @ 9:45 p.m.
900	1043	Red Shale - Shells	4-1-76.
1043	1125	Redbed	
1125	2100	Shale-Shells	Ran 24 jts of 8 5/8" csg set
2100	2120	Lime-Shale	@ 1041' Cemented w/500 sks
2120	2210	Lime	3% CC-2% Gel P.D. @ 11:45
2210	2570	Shale-Lime	PM 4-2-76
2570	3045	Lime-Shale	
3045	3165	Shale-Lime	
3165	3485	Lime-Shale	
3485	3615	Shale-Lime	Ran 167 jts of 10 1/2"
3615	3840	Lime	4 1/2" csg set @ 5081' Cemented
3840	3980	Lime-Shale	w/125 sks Common
3980	5082	Lime	Completed @ 2:20 a.m. 4-14-76
	5082 - TD		

I, James S. Sutton II, certify this is a correct copy of the Drillers' Log for the well drilled C-S/2-SW-4 Sec 33-34S-15W, Barber County Kansas to the best of my knowledge and belief.

James S. Sutton II
 JAMES S. SUTTON II

STATE OF KANSAS)
) SS
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 20th day of April, 1976, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

Elizabeth J. Edwards
 ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission Expires: February 6, 1979.

