

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Harper County, Sec. 5 Twp. 32S Rge. 6W ~~XXXX~~ (W)

Location as "NE/CNW/SE" or footage from lines NW NE SE

Lease ~~xxxx~~ Operator - Keener Oil Company

Lease Name R. Douglass Gill Well No. 1

Office Address 406 N.B.T. Bldg., Tulsa, Oklahoma 74103

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed June 26, 19 72

Application for plugging filed June 26, 19 72

Application for plugging approved June 26, 19 72

Plugging commenced June 26, 19 72

Plugging completed June 26, 19 72

Reason for abandonment of well or producing formation Non-commercial

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein & Eugene Graham

Producing formation Simpson Depth to top 4736 Bottom 4795 Total Depth of Well 4795 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface hole	Water	0	75	8-5/8	260	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fluid to 240 ft. plug 25 sx. cement
Fluid to 40 ft. plug 10 sx. cement

2 shs. in rathole

RECEIVED
STATE CORPORATION COMMISSION
JUL 14 1972
CONSERVATION DIVISION
Wichita, Kansas

Thomas Drilling Co. (If a description is necessary, use BACK of this sheet)


Name of Plugging Contractor Thomas Drilling Co. Address BOX 400, Duncan, Oklahoma 73533

STATE OF OKLAHOMA COUNTY OF TULSA, ss. F. W. Weaver (employee of ~~xxxxxx~~ or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F.W. Weaver 406 N.B.T. Bldg., Tulsa, Oklahoma (Address)

SUBSCRIBED AND SWORN to before me this 12th day of July 19 72

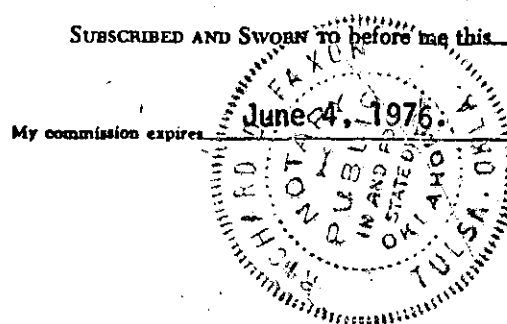

Notary Public.

DRILLERS WELL LOG

Keener Oil Company
R. Douglass Gill No. 1
NW NE SE, Section 5-32S-6W
Harper County

Elevation: 1390 Gr.

Commenced: 6-15-72
Completed: 6-27-72

Surface Casing: 8-5/8" cmt'd
w/250 sx. w/3% HA5 @ 260 ft.
6-15-72

<u>Formation</u>	<u>Depth</u>
Surface hole	0 - 75
Red bed	75 - 261
Red rock	261 - 350
Red bed - shale	350 - 1150
Anhydrite	1150 - 1396
Shale & lime	1396 - 2474
Lime & shale	2474 - 2810
Shale & lime	2810 - 3050
Lime	3050 - 3142
Shale & lime	3142 - 3190
Lime	3190 - 3396
Shale & lime	3396 - 3745
Lime	3745 - 3930
Lime & shale	3930 - 4055
Lime	4055 - 4154
Lime & shale	4154 - 4245
Lime	4245 - 4330
Chert	4330 - 4460
Lime	4460 - 4668
Shale-sand	4668 - 4736
Sand	4736 - 4795
Total depth	4795

RECEIVED
STATE CORPORATION COMMISSION
JUL 14 1972
CONSERVATION DIVISION
Wichita, Kansas

I do certify that the foregoing statements are true and correct to the best of my knowledge and belief.

KEENER OIL COMPANY

F. W. Weaver

F. W. Weaver
Production Superintendent.

STATE OF OKLAHOMA
COUNTY OF TULSA

Subscribed and sworn to before me, the undersigned, a Notary Public, in and for said County and State, this 12th day of July, 1972.

My commission expires: June 4, 1976

Richard D. Faxon
Richard D. Faxon, Notary Public