


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Harper County, Sec. 28 Twp. 31S Rge. ~~8~~ 9 (W)

Location as "NE/CNW/SW" or footage from lines C SE SW
Lease Owner Graves Drilling Co., Inc.
Lease Name Burgess Well No. 1
Office Address 505 Union Center, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 4, 1968
Application for plugging filed May 4, 1968
Application for plugging approved May 4, 1968
Plugging commenced May 4, 1968
Plugging completed May 4, 1968
Reason for abandonment of well or producing formation _____

NORTH

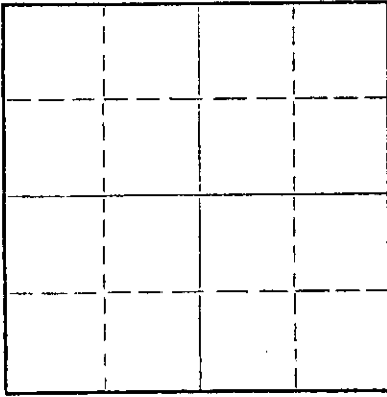

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well R. J. Warren, Pratt, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4500 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	227'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mudded up with heavy mud to 220 feet. Followed by wooden plug and 1/2 sack hulls. Placed 25 sacks cement onto hulls. Mudded up with heavy mud to 40 feet followed by wooden plug, 1/2 sack hulls and 10 sacks cement to base of well cellar. Plugged rat hole with 2 sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
MAY 10 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Graves Drilling Co., Inc.
Address 505 Union Center, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
John C. Graves (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John C. Graves
505 Union Center, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of May, 19 68

My commission expires May 9, 1971

Betty Brandt
Betty Brandt Notary Public.

R O T A R Y D R I L L E R S ' L O G

OPERATOR: Graves Drilling Co., Inc. DRILLING COMMENCED: April 26, 1968
505 Union Center
Wichita, Kansas 67202

CONTRACTOR: Graves Drilling Co., Inc. DRILLING COMPLETED: May 4, 1968
505 Union Center
Wichita, Kansas 67202

CASING RECORD: 11 Jts. 227' 8-5/8" cemented with 175 sacks LOCATION: Burgess No. 1
C SE SW
Section 28-31S-9W
Harper County, Kansas

0 - 230.	Red bed
230 - 449	Shale & shells
449 - 1226	Shale, shells & red bed
1226 - 1416	Shale & lime streaks
1416 - 2087	Lime & shale
2087 - 2315	Lime & shale streaks
2315 - 2875	Shale & lime
2875 - 3085	Lime & shale streaks
3085 - 3510	Lime & shale
3510 - 3578	Shale & lime
3578 - 3694	Shale & sand
3694 - 3710	Brown lime & shale
3710 - 4245	Lime
4245 - 4450	Shale & lime
4450 - 4500	Lime
4500	Rotary Total Depth

RECEIVED
STATE CORPORATION COMMISSION
MAY 10 1968
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the foregoing statements to be true and correct to the best of my knowledge.

GRAVES DRILLING CO., INC.

By John Graves
President

STATE OF KANSAS)
) ss.
SEDGWICK COUNTY)

Subscribed and sworn to before me, a Notary Public, this 9th of May, 1968.

Betty Brandt
Betty Brandt Notary Public

My commission expires May 9, 1971