


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

~~SUMNER~~ Harpis County, Sec. 31 Twp. 31S Rge. 9W (E) (W)
Location as "NE/CNW/SW" or footage from lines SW NE SE
Lease Owner WALTERS, BOA, et al
Lease Name BEST UNIT Well No. 1
Office Address 510 Orpheum Building
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed 9-20-60 19
Application for plugging filed 9-18-60 19
Application for plugging approved 9-18-60 19
Plugging commenced 9-20-60 19
Plugging completed 9-20-60 19
Reason for abandonment of well or producing formation _____

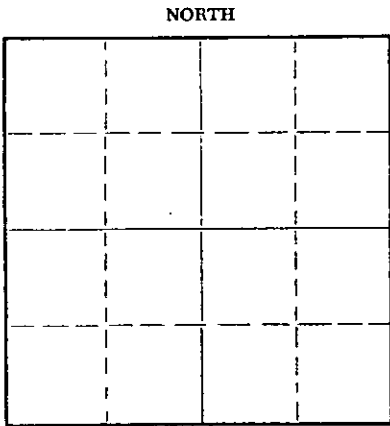

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Fred Hample
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4420 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				202'	8-5/8"	---
				2-1/8" Tbg	4424'	2883'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

After tubing cut and pulled, filled with heavy mud to 200' set plug with 20 sx cmt, filled with heavy mud to 35' set solid bridge with 10 sx cmt to base of cellar.

Job complete 9-20-60

RECEIVED
STATE CORPORATION COMMISSION
NOV 29 1960
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Pratt Well Service
Address Pratt, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
R. L. Abel (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. L. Abel
R. L. Abel of Walters Drilling Co.
510 Orpheum Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of November 19 60.

My commission expires August 11th, 1962.
Patricia M. Edwards
Notary Public.




WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
 508 East Murdock, Wichita, Kansas

Company- WALTERS DRILLING CO. ET AL
 Farm- Best Unit No. 1

SEC. 31 T. 31 R. 9W
 SW NE SE

Total Depth. 4430'
 Comm. 8-9-60 Comp. 8-21-60
 Shot or Treated.
 Contractor. Walters Drig.
 Issued. 10-22-60

County Harper
 KANSAS



Elevation. 1541' KB

Production. Dry

CASING:

8 5/8" 202' cem w/170 sx.
 2 7/8" 4424' cem w/250 sx.

Figures Indicate Bottom of Formations.

surface soil, shale & shells	205
red rock & shale	700
shale & shells	1400
lime & shale	1690
lime	1835
lime & shale	2505
shale	2725
shale & lime	3737
lime	4174
lime & shale	4372
lime & chert	4390
lime	4430

Total Depth

TOPS: SCOUT

Heebner	3444
Toronto	3498
Douglas	3522
Douglas Sand	3558
Lansing	3643
Kansas City	3962
Base Kansas City	4180
Mississippi Chert	4352
Mississippi Lime	4386