


15-007-01509-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barber County. Sec. 12 Twp. 32S Rge. 14 (E) (W) X
Location as "NE/CNW&SW&" or footage from lines 660' from S.L. 710' from E.L.
Lease Owner Continental Oil Company
Lease Name Mand Brook et al Well No. 1
Office Address P. O. Box 267 Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19____
Application for plugging filed 12-31-63 19____
Application for plugging approved 1-1-64 19____
Plugging commenced 1-3-64 19____
Plugging completed 1-11-64 19____
Reason for abandonment of well or producing formation Dry

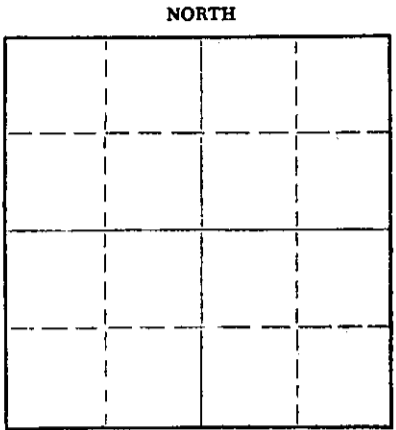

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Archie V. Elving
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4547 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				13 3/8	280	None
				1 1/2	None	3147

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Cleaning out cellar.
Sanded to 4520' and 3 sacks of cement.
Rigging up jacks. Working.
Shot well at 3750'. Working pipe. Shot well at 3624'. Working pipe.
Tried to pump out but couldn't. Shot well at 2414'. Working pipe. Spotted oil.
Working pipe. Pulling pipe.
Pulling pipe.
Plugging well at 230'. Build 18' rock bridge and 30 sacks of cement. Mudded to 40'. Build 10' rock bridge and 20 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
JAN 16 1964
1-16-64
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling, Inc.
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
P. O. Box 221 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 15 day of January 19 64

My commission expires May 27, 1964

[Signature]
Notary Public.

