

15-007-00029-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Barber

County. Sec. 5 Twp. 32S Rge. 14 (E) W (W)

Location as "NE/CNW/SW" or footage from lines 330' f/S & 1240' f/E lines

Lease Owner Continental Oil Company

Lease Name Lora Mills Estate

Well No. 1

Office Address Box 30, Lyons, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed June 9, 19 61

Application for plugging filed June 9, 19 61

Application for plugging approved June 9, 19 61

Plugging commenced June 9, 19 61

Plugging completed June 9, 19 61

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fred Hample, Pretty Prairie, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5075 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		surface	253'	13 3/8"	253'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud to 240'. Dumped one-half sack of hulls and set plug at 240'. Pumped in 20 sacks of cement through drill pipe. Mudded hole to 40' from surface. Dumped one-half sack of hulls and set plug at 40'. Filled hole with 20 sacks of cement to surface. Filled rat hole with 5 sacks cement. Well plugged at 6:30 p.m. on June 9, 1961.

RECEIVED
STATE CORPORATION COMMISSION
JUN 15 1961
6-15-61
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Peel Brothers, Incorporated
Address Hoisington, Kansas

STATE OF Kansas, COUNTY OF Rice, ss. F. L. Dunn

(employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) F. L. Dunn

(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of June, 1961.

My commission expires May 5, 1965

Jack S. Mowbray
Notary Public.

24-2675-5 2-52-20M

RECEIVED
 STATE CORPORATION COMMISSION
 JUN 19 1961
 6-19-61
 CONSERVATION DIVISION
 Wichita, Kansas

DRILLERS' LOG

Well Owner: Continental Oil Company 330' f/SL; 1240' f/EL
 Well Name: Lora Mills Estate #1 Sec. 5, Twp. 32S, Rge. 14W
 Commenced: 5/17/61
 Completed: 6/9/61 County: Barber, Kansas
 Total Depth: 5075' Elevation:
 Casing: 13-3/8" @ 253' cem. Production: Dry
 Contractor: Peel Brothers, Inc.

Figures below indicate bottoms of formations:

Surface rock	0-	50
Red bed		256
Redbed, sand & shale		865
Red bed		1300
Shale & salt		1500
Shale & shells		1745
Lime & shale		1825
Lime		2095
Lime & shale		3965
Shale Lime & sand		4025
Sand & shale		4054
Sand, shale & lime		4085
Lime		4878
Core		4908
Shale & sand		4941
Lime		5075
Total Depth		5075

This is to certify that the above information is to the best of our knowledge, true and correct.

PEEL BROTHERS, INC.


Wendell G. Peel
 BY _____


SUBSCRIBED AND SWORN to before me this 14 day of June, 1961.

My commission expires: April 27, 1964

Ruth Brant

 Notary Public

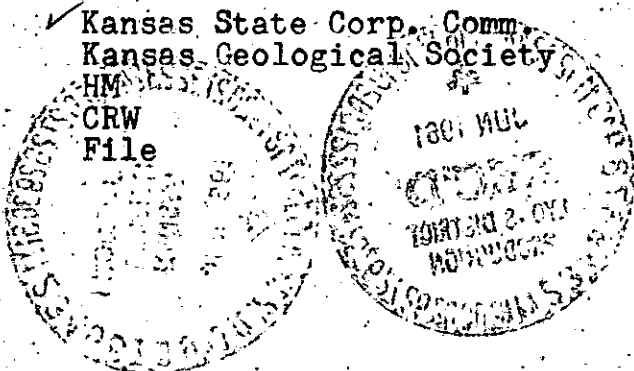



RECEIVED BY: [illegible]

DATE: [illegible]

RECEIVED BY: [illegible]

DATE: [illegible]

[Handwritten signature]

RECEIVED BY: [illegible]

RECEIVED BY: [illegible]

RECEIVED BY: [illegible]

[illegible]

RECEIVED BY: [illegible]

[illegible]

RECEIVED BY: [illegible]

[illegible]

RECEIVED BY: [illegible]

[illegible]

RECEIVED BY: [illegible]

[illegible]

RECEIVED BY: [illegible]

[illegible]

RECEIVED BY: [illegible]

RECEIVED BY: [illegible]

RECEIVED BY: [illegible]

RECEIVED BY: [illegible]

[Handwritten notes and stamps]