

15-007-01045-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Barber

County. Sec. 11 Twp. 32 Rge. 14 (X) W (W)
SW NE

NORTH

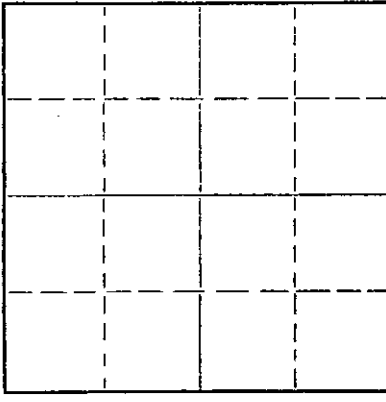

Locate well correctly on above
Section Plat

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Raymond Oil Company, Inc.
Lease Name Lake Well No. 1
Office Address 410 Fourth National Bank Building, Wichita 2, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed November 24, 1961
Application for plugging filed November 24 19 61
Application for plugging approved November 24 19 61
Plugging commenced November 24 19 61
Plugging completed November 24 19 61
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4410 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				13 3/8	200'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill hole to 220' with mud.
Set bridge w/1/2 Sx. hulls on top and 25 Sx. cement.
Fill hole to 30' with mud.
Set bridge w/ 1/2 Sx. hulls on top and 15 Sx. cement.
2 Sx. Cement in Rat Hole.

STATE CORPORATION COMMISSION
NOV 29 1961
11-30-61

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Raymond Oil Company, Inc.
Address 410 Fourth National Bank Building, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Pat Raymond (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Pat Raymond
410 Fourth National Bank Building, Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of November, 19 61
Bernice Bolt
Notary Public.

My commission expires December 10, 1962

RAYMOND OIL COMPANY, INC. #1 LAKE
 C SW NE, Section 11-32S-14W
 Barber County, Kansas

Contractor: Company Tools - Rig #3
 Commenced: November 11, 1961
 Completed: November 24, 1961

ELEVATION: 1686 DF
 1689 KB

Casing Record
 13 3/8" @ 214'

Figures Indicate Bottom of Formation

<u>Formation</u>	<u>Depth</u>
Red Bed	334
Shale , shells and Red Bed	900
Red Bed	1000
Shale and Shells	1725
Lime	1910
Lime with Shale	2010
Lime	2295
Lime and Shale	2345
Lime	2450
Lime and Shale	2641
Shale	2815
Shale and Lime	3120
Lime	3365
Lime and Shale	3632
Lime	3755
Shale with Lime and Sand	3850
Shale	3861
Sand	3877
Lime	4174
Lime with Shale	4259
Lime	4349
Lime with Shale	4410
 <u>TOPS</u>	
Heebner	3716
Douglas Shale	3746
Douglas Sand	3842
Lansing-Kansas City	3883
Base Kansas City	4289
Marmaton	4300
Mississippi	4389
Rotary Total Depth	4410

RECEIVED
 STATE CORPORATION COMMISSION
 DEC 3 1962
 12-3-62
 CONSERVATION DIVISION
 Wichita, Kansas

STATE OF KANSAS)
) SS.
 COUNTY OF SEDGWICK)

I hereby certify that the above is true and correct to the best of my knowledge.

Wm M Raymond
 Wm. M. Raymond, President

Bernice Boldt
 Notary Public



My commission expires
 December 10, 1962