


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Barber County, Sec. 1 Twp. 30 Rge. (E) 14 (W)

Location as "NE/CNW/SW" or footage from lines W/2 NW
Lease Owner Robert L. Austin
Lease Name Shriver Well No. 1
Office Address P. O. Box 159, Stafford, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 1/4/45 19
Application for plugging filed 19
Application for plugging approved July 30, 1969 19
Plugging commenced August 20, 1969 19
Plugging completed August 23, 1969 19
Reason for abandonment of well or producing formation Uneconomical to produce

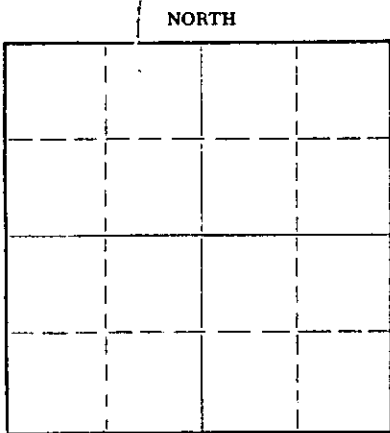

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 7/4/69 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well R. J. Warren
Producing formation Simpson Depth to top 4462 Bottom 4472 Total Depth of Well 4540 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	510'	NONE
				5 1/2"	4540'	2215'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

- 8/20/69 Dig out cellar - set pipe pulling unit.
- 8/21/69 Dig deadman holes - rig up - push plug to 4,000 ft.-sand back to 3975 dump 5 sax cement - load hole with water - work pipe 21'.
- 8/22/69 Shoot & work pipe @ 3002-2612-2400-2215 - pull 28 joints pipe.
- 8/23/69 Pull 42 joints pipe - total 2225 ft.-muc to 220 ft.-10 ft. rock bridge to 210 ft.-dump 3 yds ready mix cement to surface - tear down.

RECEIVED
STATE CORPORATION COMMISSION
AUG 28 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Ralph Comstock Pipe Pulling, Inc.
Address 320 N. Park, Stafford, Kansas

STATE OF Kansas, COUNTY OF Stafford, ss.
Robert L. Austin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well tested and that the same are true and correct. So help me God.

(Signature) *Robert L. Austin*
P. O. Box 159, Stafford, Kansas 67578 (Address)

SUBSCRIBED AND SWORN to before me this 27 day of August, 1969
Irene L. Benton Notary Public.

My commission expires 1/28/73

