

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-179-21346-00-00
Spot: SENWSESE Sec/Twnshp/Rge: 24-6S-26W
833 feet from S Section Line, 763 feet from E Section Line
Lease Name: MARX "A" Well #: 1-24
County: SHERIDAN Total Vertical Depth: 3933 feet

Operator License No.: 34579
Op Name: COBALT ENERGY LLC
Address: 115 S. BELMONT #12 PO BOX 8037
WICHITA, KS 67208

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	316		250 sx

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 01/08/2014 12:00 AM
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.
Proposal Rcvd. from: ANDY Company: MURFIN DRILLING CO., INC. Phone: (785) 443-2379

Proposed Plugging Method: Ordered 220 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN WitnessType: NONE
Date/Time Plugging Completed: 01/08/2014 2:15 PM KCC Agent: DAVID WANN

Actual Plugging Report:

1st plug @2170 w/25 sx
2nd plug @1420 w/100 sx
3rd plug @365 w/40 sx
4th plug @40 w/10 sx

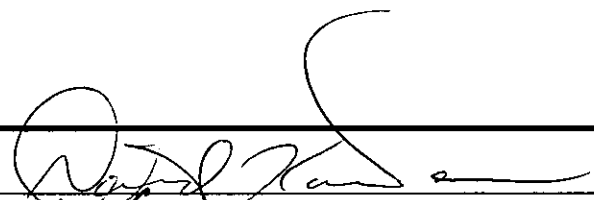
Rathole 30 sx Mousehole 15 sx

Perfs:

Remarks: ALLIED

Plugged through: DP

District: 04

Signed 
01/30/14 (TECHNICIAN) *CM*

KCC WICHITA

Form CP-2/3

JAN 15 2014

RECEIVED

JAN 09 2014